


ABSTRACT

The Midwest Regional Carbon Sequestration Partnership (MRCSP) is currently in the final phases of comprehensive characterization of carbon capture utilization and storage (CCUS) opportunities throughout the ten-state region. Spanning from the offshore Atlantic Coastal Plain through the Appalachian and Michigan basins, this region hosts a diverse assemblage of reservoir types and provides multiple CCUS targets. A key component of this research is the evaluation of opportunities for enhanced oil recovery (EOR) in legacy oil fields via carbon dioxide (CO₂) floods. In support of this task, the West Virginia Geological and Economic Survey (WVGES) has developed a set of "quick-look" maps that illustrate state-specific opportunities for CO₂-EOR. These maps contain a variety of field-specific data, including CO₂ storage capacity, residual oil in place, and oil gravity.


Several data types, most notably reservoir permeability and oil gravity, are significantly under-represented in the dataset. Oil gravity is particularly useful as it is used to calculate minimum miscibility pressure. In this case, methods were developed to help predict values for oil fields in the Appalachian Basin where applicable.

For each of seven MRCSP partner states (NY, PA, WV, KY, OH, IN, MI), a map was developed illustrating the location and reservoir characteristics of key legacy fields, as well as their proximity to major CO₂ point sources. This work is designed to be used by any researcher or stakeholder interested in investigating viable CCUS opportunities within the MRCSP region.


MRCSP is supported by U.S. Department of Energy-National Energy Technology Laboratory Agreement No. DE-FC26-0NT42589.

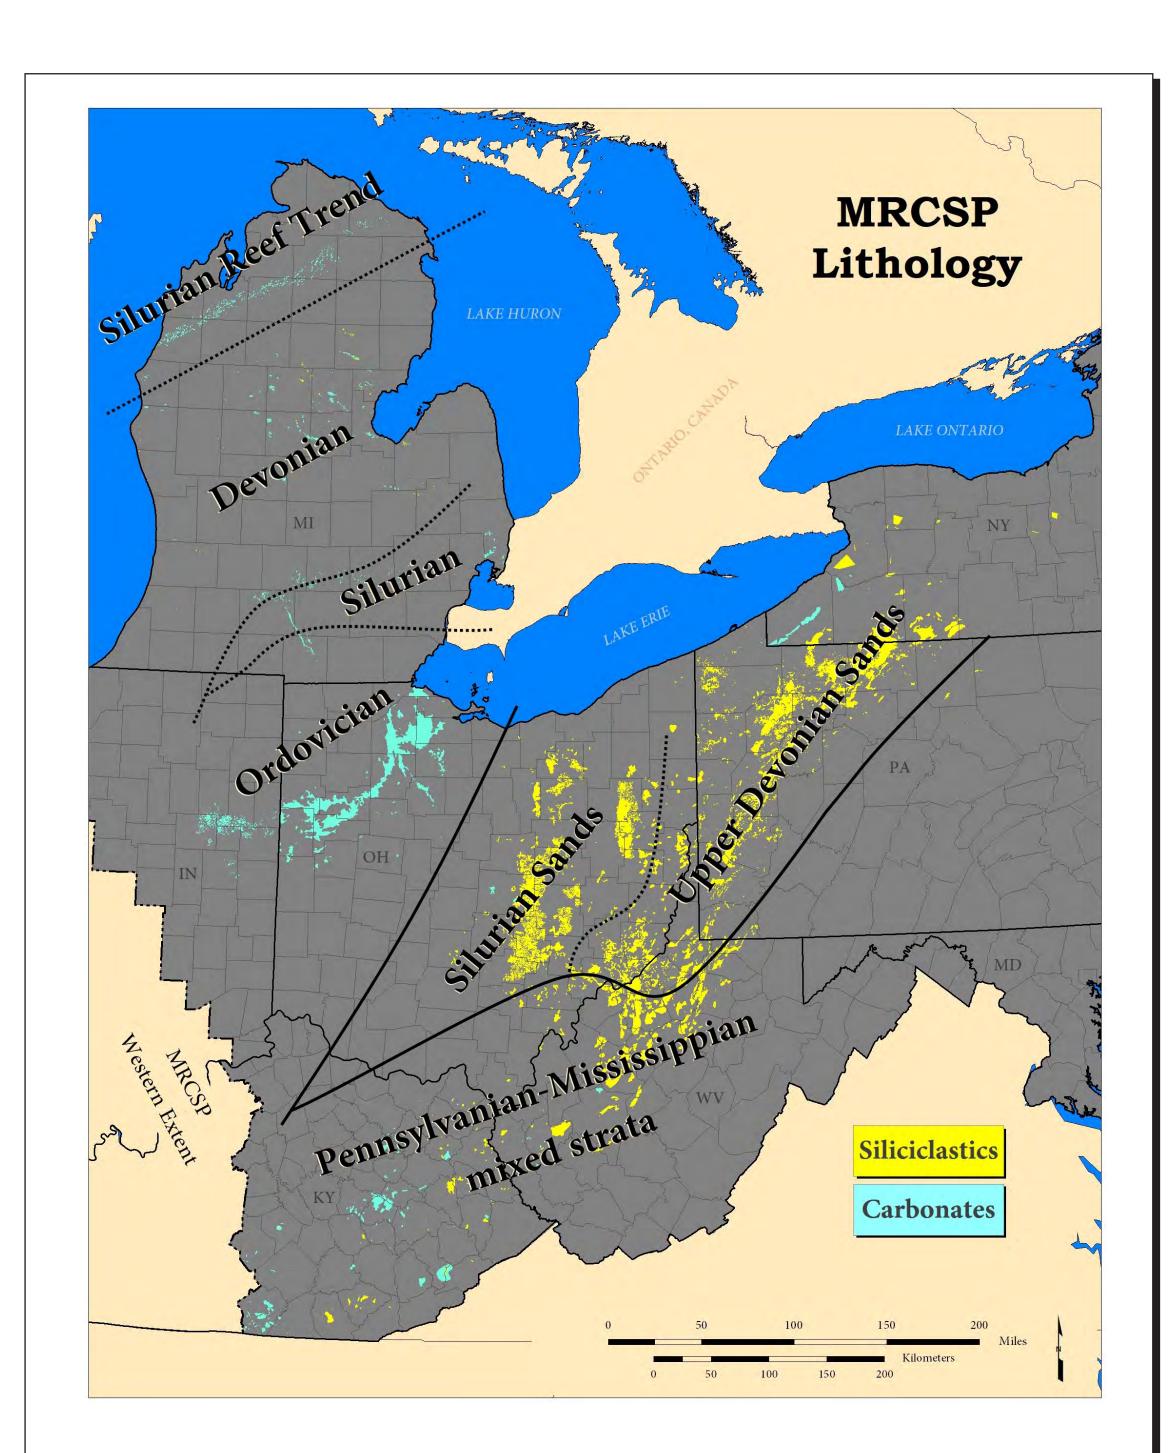

The dominant lithologies of active and legacy oil fields within the two separate basins are distinctly different. Carbonates dominate the Michigan Basin, whereas siliciclastics are confined to the Appalachian Basin.

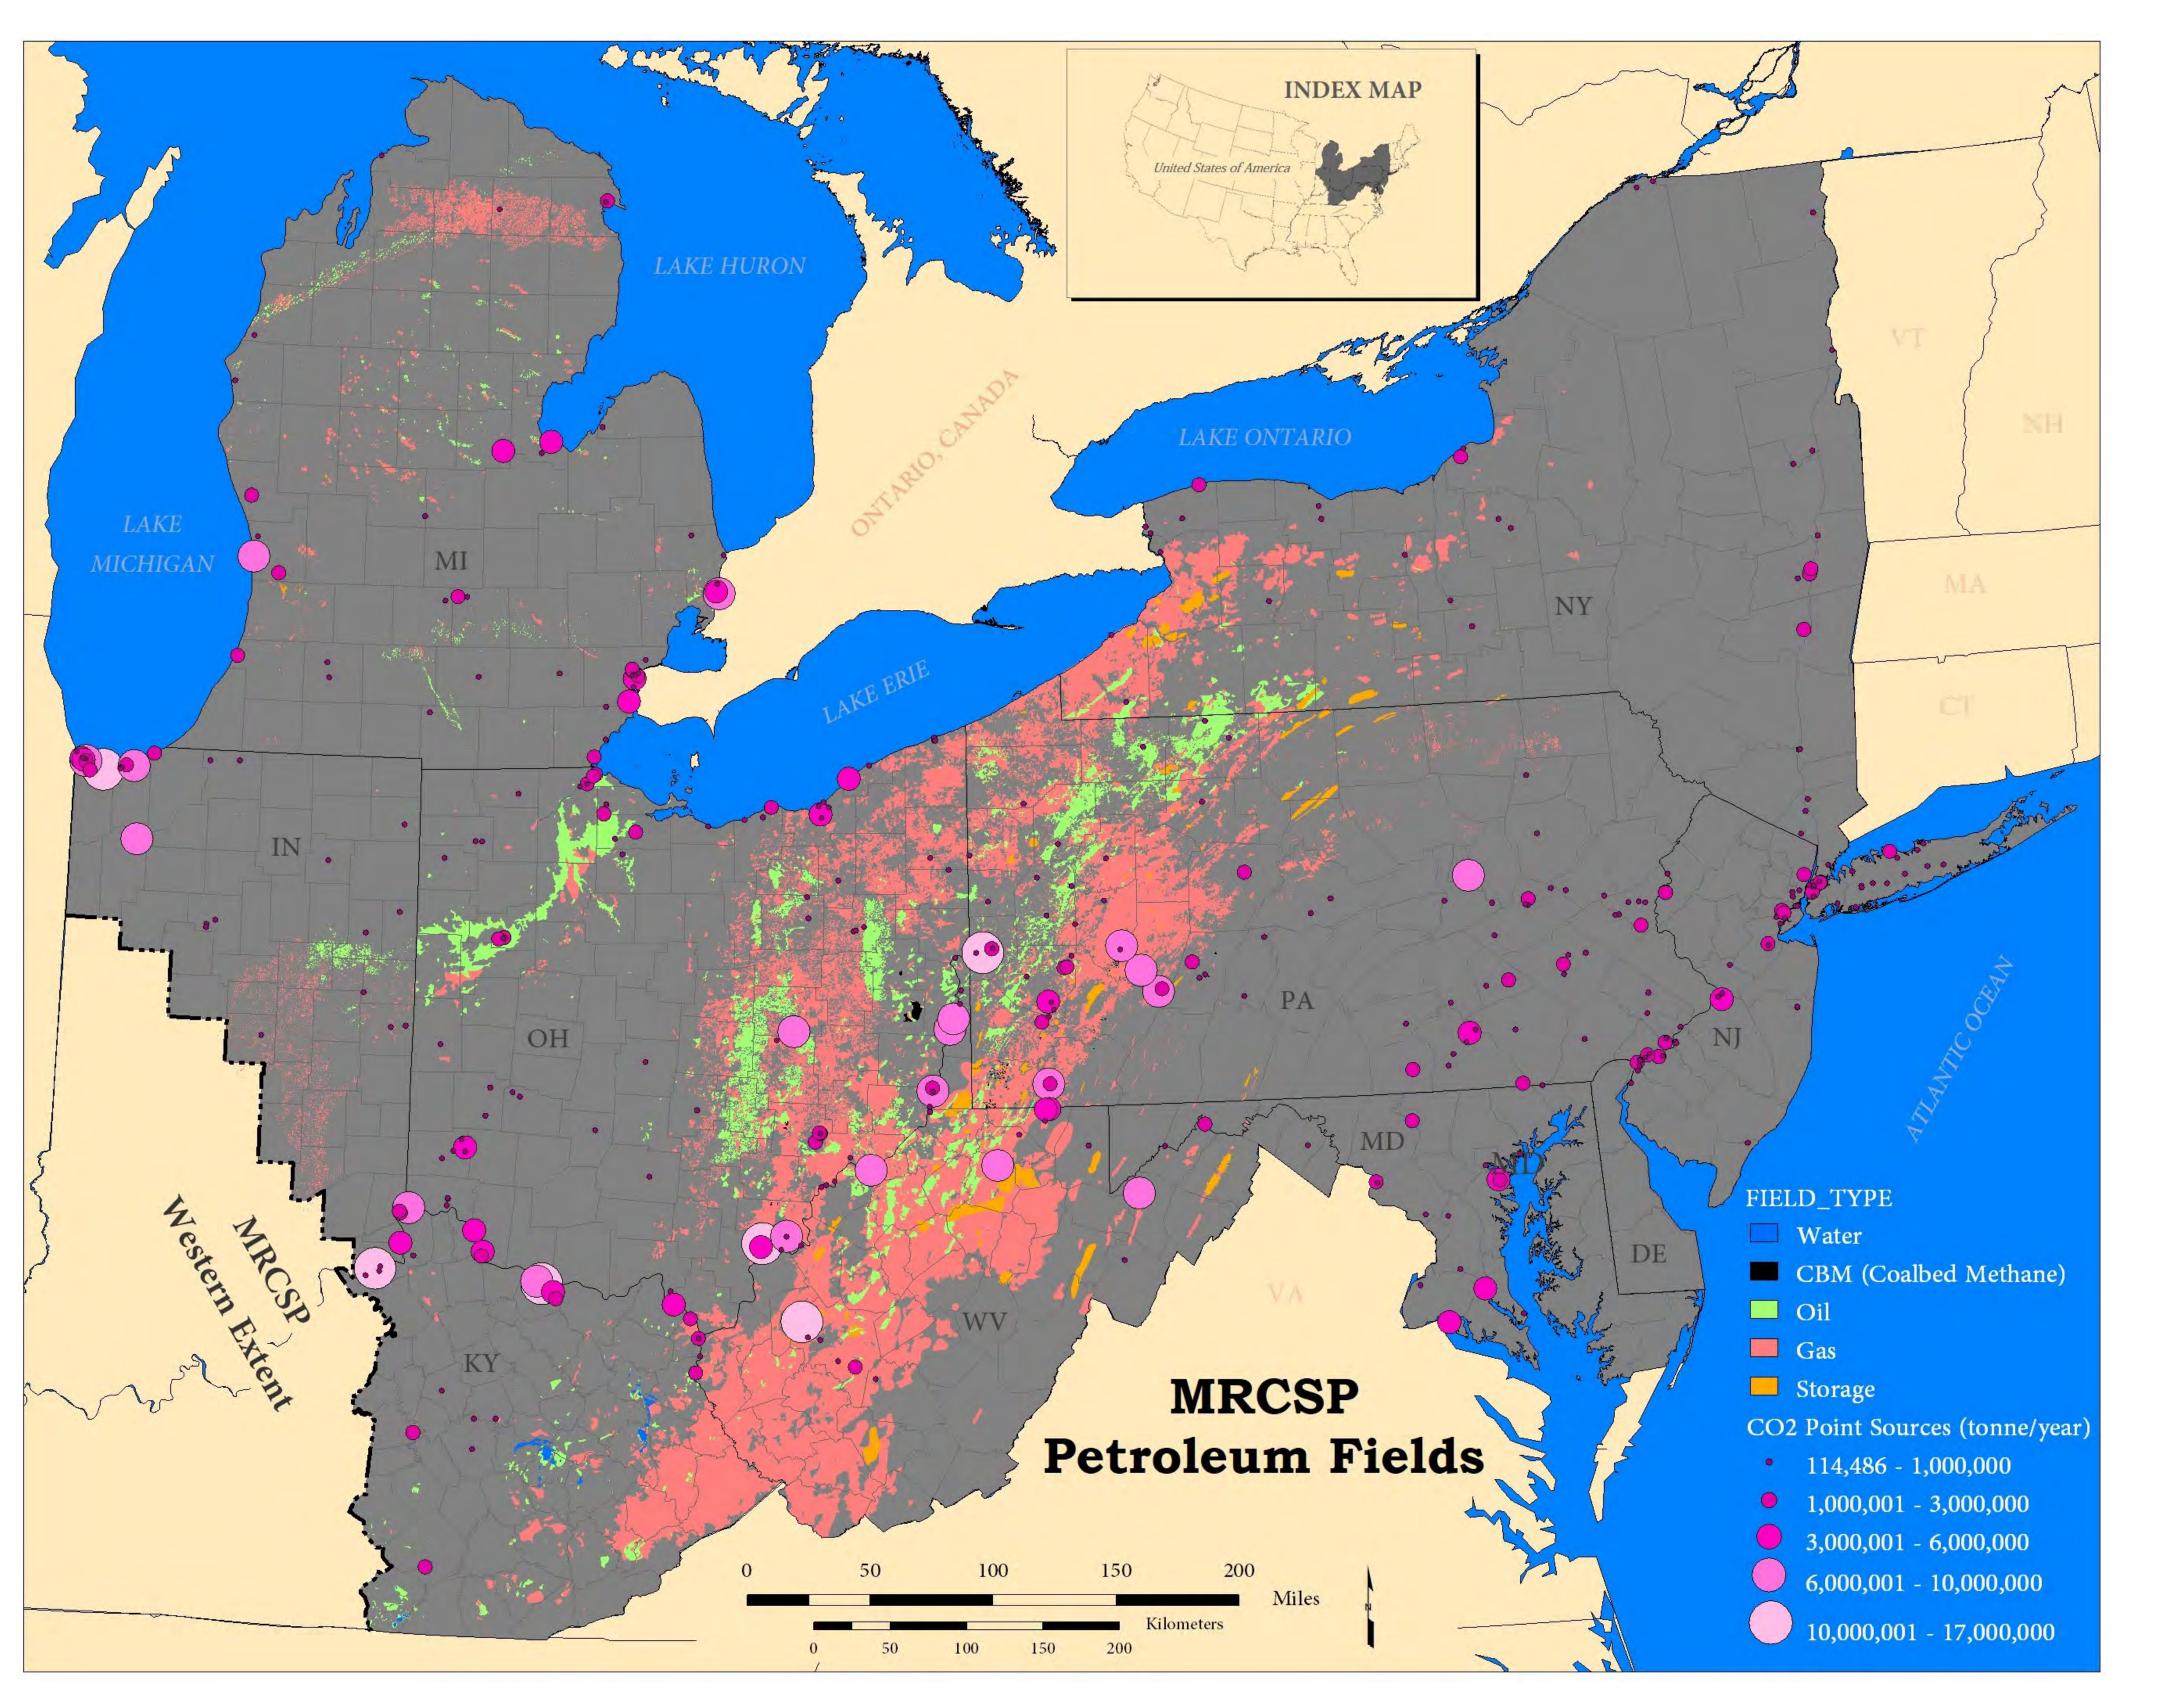


Updated geospatial distribution of petroleum fields for MRCSP Phase III, Budget Period 4, in relation to power plants within the region. WVGES is responsible for evaluating regional support for implementation of carbon capture utilization and storage (CCUS). Proximity to point sources is a major factor when assessing reservoirs and their ability to utilize and store CO₂ (modified MRCSP, 2009) (NATCARB, 2014).

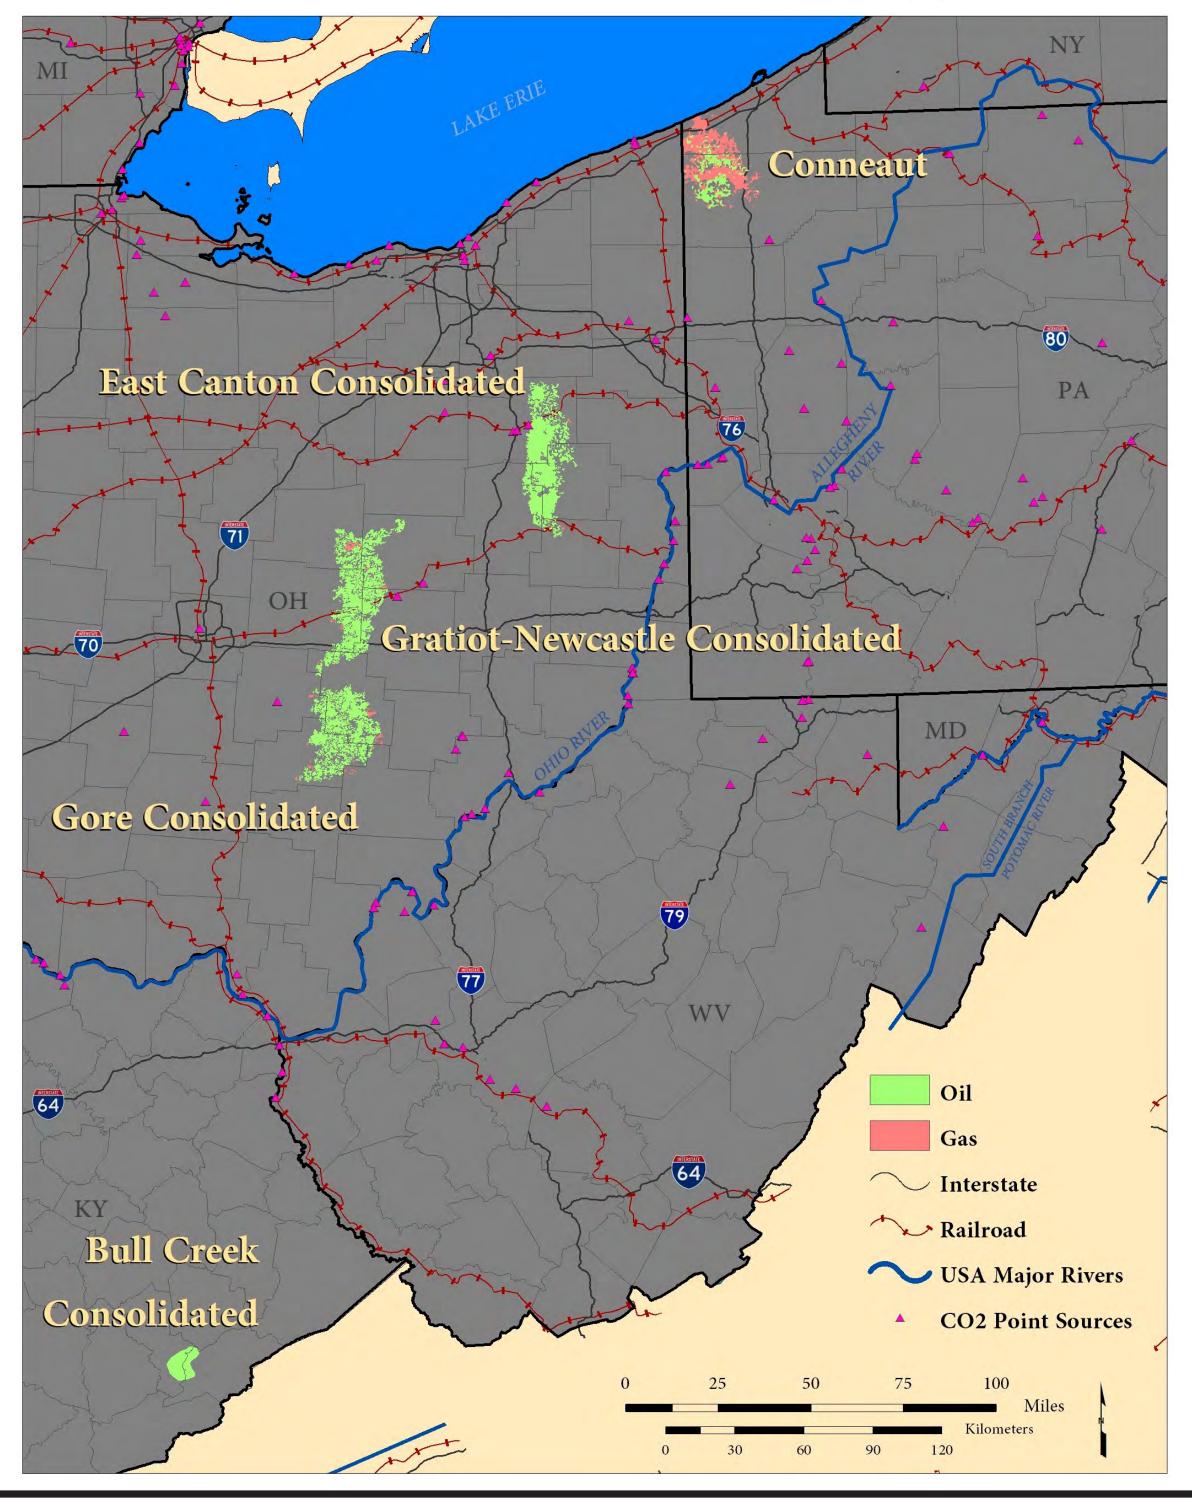


Development of Quick-Look Maps for CO₂ - EOR Opportunities in the Appalachian and Michigan Basins

¹West Virginia Geological and Economic Survey, 1 Mont Chateau Road, Morgantown, WV 26508, http://www.wvgs.wvnet.edu/ KEYWORDS: EOR, CO₂, Appalachian Basin, Michigan Basin, CCUS, MRCSP

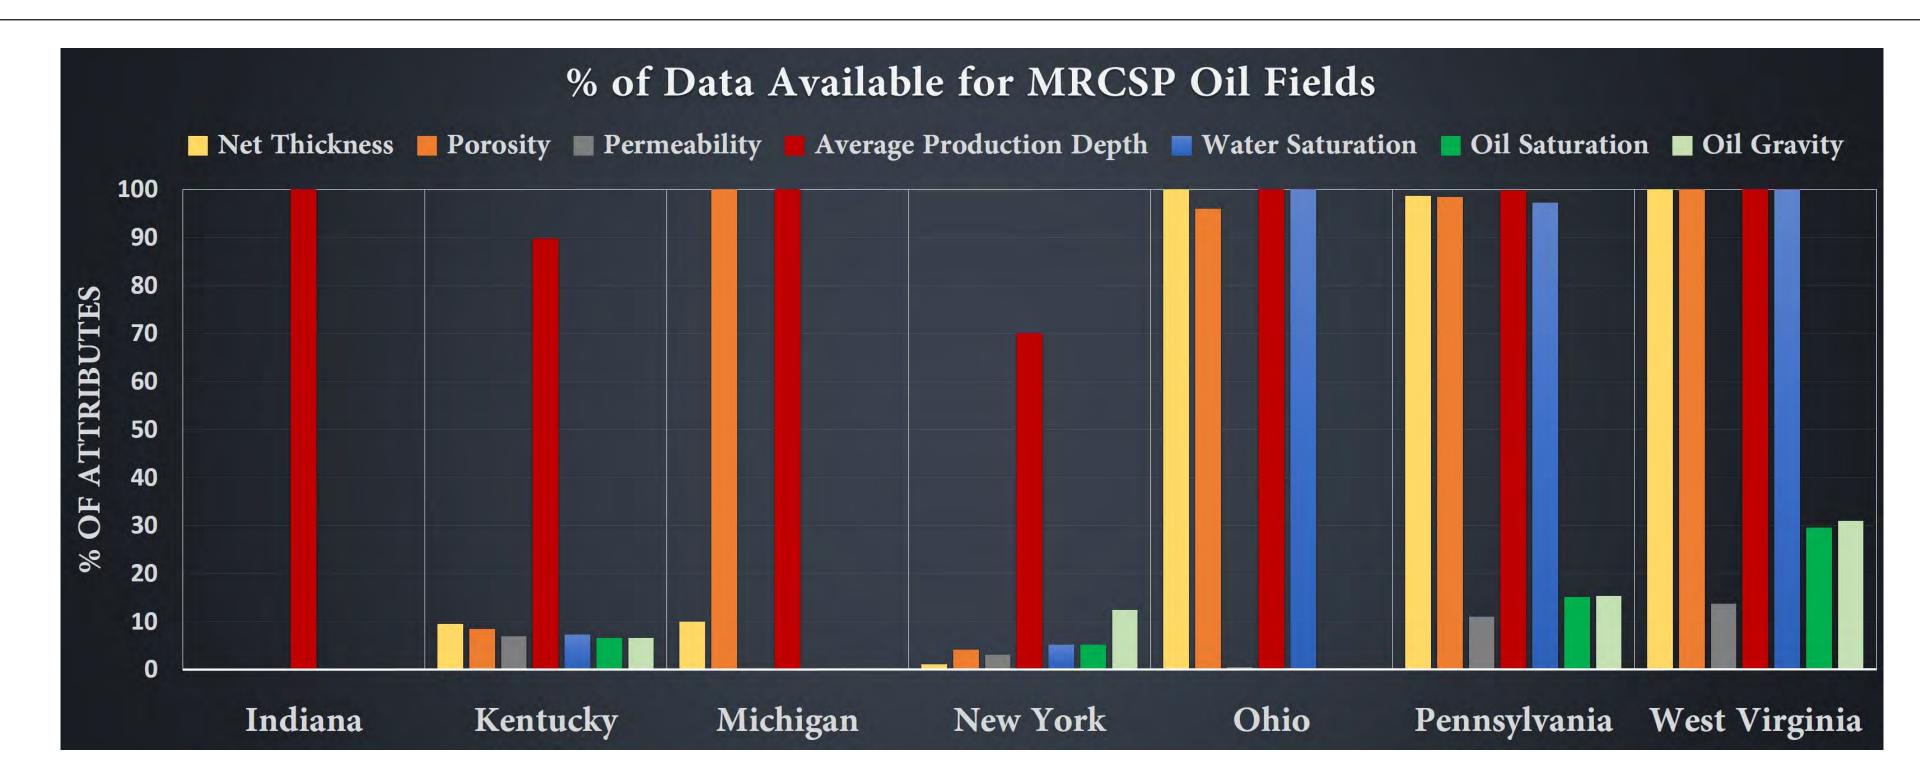

Previous MRCSP phases have focused on storage in deep saline aquifers and reservoir data such as thickness, porosity, depth, and water saturation were collected (MRCSP, 2005). Permeability, although limited in availability, has been added, as well as oil gravity and oil saturation, due to the new focus on EOR in the current phase.

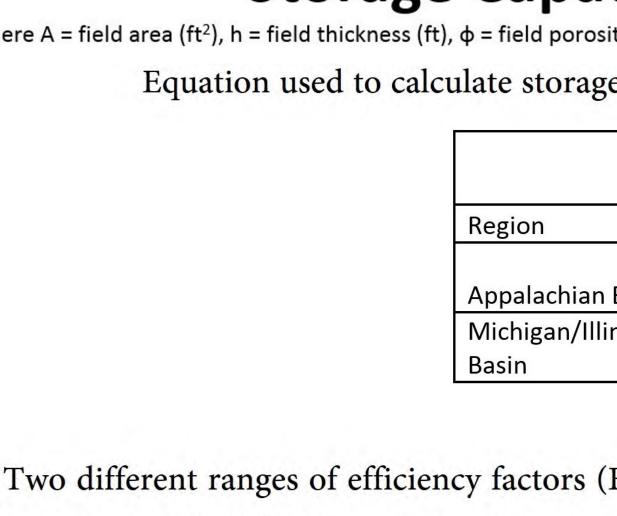

recovery process (Kuuskraa et al, 2011).

Top 5 Oil Fields with Highest Storage Capacities


The five oil fields in the MRCSP region with the highest capacities to store CO₂ are found along the western edge of the Appalachian Basin and, according to average depths, appear to be capable of miscible CO, floods. However, high storage capacity estimates may be due to the large aggregate size of these consolidated fields, which consist of multiple smaller pools and/or reservoirs.

All are active oil and gas fields, but only one (Bull Creek Consolidated) has historical records on oil production (CumOilPro) and estimates of Original Oil in Place (OOIP), enabling calculation of Remaining Oil in Place (ROIP) and Potential Oil Recovery (PotOilRec).

Remaining Oil in Place (ROIP) = OOIP - CumOilPro. Potential Oil Recovery (PotOilRec) = 10% of OOIP (miscible) (MRCSP,

Production in Bull Creek Consolidated is primarily from the Mississippian Newman Limestone. The Conneaut field in north-western Pennsylvania produces from multiple formations and lithologies, ranging in age from Cambrian through Devonian; however, sandstones of the Cambrian Gatesburg and Silurian Medina are the dominant reservoirs. In eastern Ohio, East Canton, Gratiot-Newcastle, and Gore Consolidated fields exclusively target the Silurian Clinton Sandstone.

* Total storage capacities in the graph to the right reflect those of oil AND gas pools/reservoirs within fields.

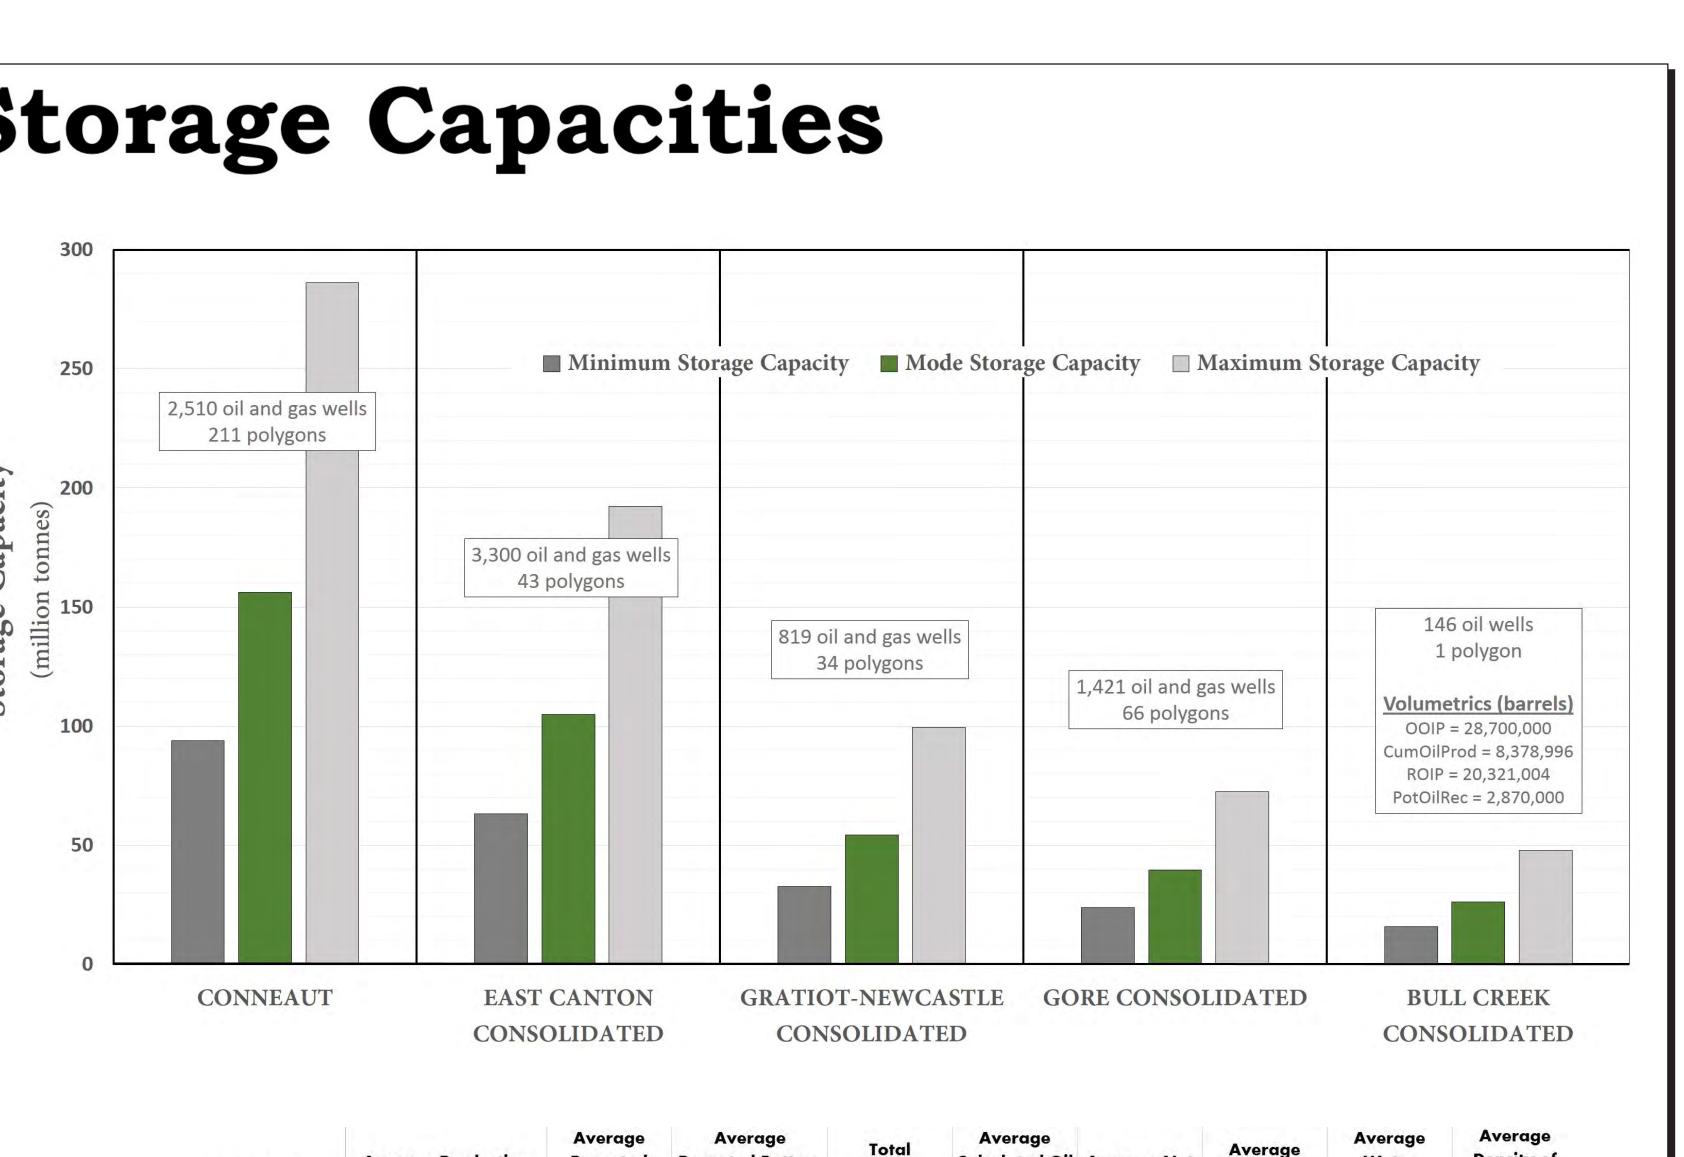

FIELD NAME	Average Production Depth (ft)	Average Reported Initial Pressure (psi)	Average Reported Bottom Hole Temperature (°F)	Total Reservoir Area (sq ft)	Average Calculated Oil Gravity (decimal)	Average Net Thickness (ft)	Average Porosity (decimal)	Average Water Saturation (decimal)	Average Density of CO2 at depth (lbs/ft³)
CONNEAUT	4,372	991	95.65	8,371,268,095	0.63	61	0.09	0.37	41.81
EAST CANTON CONSOLIDATED	5,300	1,500	100.00	7,156,962,202	0.75	43	0.08	0.25	44.80
GRATIOT-NEWCASTLE CONSOLIDATED	3,010	1,000	90.00	7,845,642,883	0.70	16	0.10	0.30	46.45
GORE CONSOLIDATED	3,130	1,200	90.00	6,396,756,708	0.69	15	0.10	0.31	45.92
BULL CREEK CONSOLIDATED	3,030	460	86.00	1,448,808,820	0.85	24	0.14	0.15	47.24


Authors: Eric Lewis¹, Jessica Pierson Moore¹, Philip Dinterman¹, Michael E. Hohn¹, Ronald McDowell¹, Susan Pool¹

Storage Capacity = A*h*φ*(1-Sw)*ρ*Ef/2200


where A = field area (ft²), h = field thickness (ft), φ = field porosity, Sw = connate water saturation, ρ = CO2 density (lb/ft³), 2200 = conversion factor, Ef = storage efficiency factor Equation used to calculate storage capacity, in tonnes, for all petroleum fields within the MRCSP region.

		EOR Efficiency Factor				
	States	Min	Mode	Max		
	ОН, Е. КҮ, РА,					
n Basin	WV, NY	0.177	0.294	0.539		
llinois						
	MI, IN, W. KY	0.372	0.557	0.680		

Two different ranges of efficiency factors (Ef) are used because the study area includes both the Appalachian and Michigan basins. The "Min", "Mode", and "Max" factors refer to the fraction of oil that can be produced at different stages of the

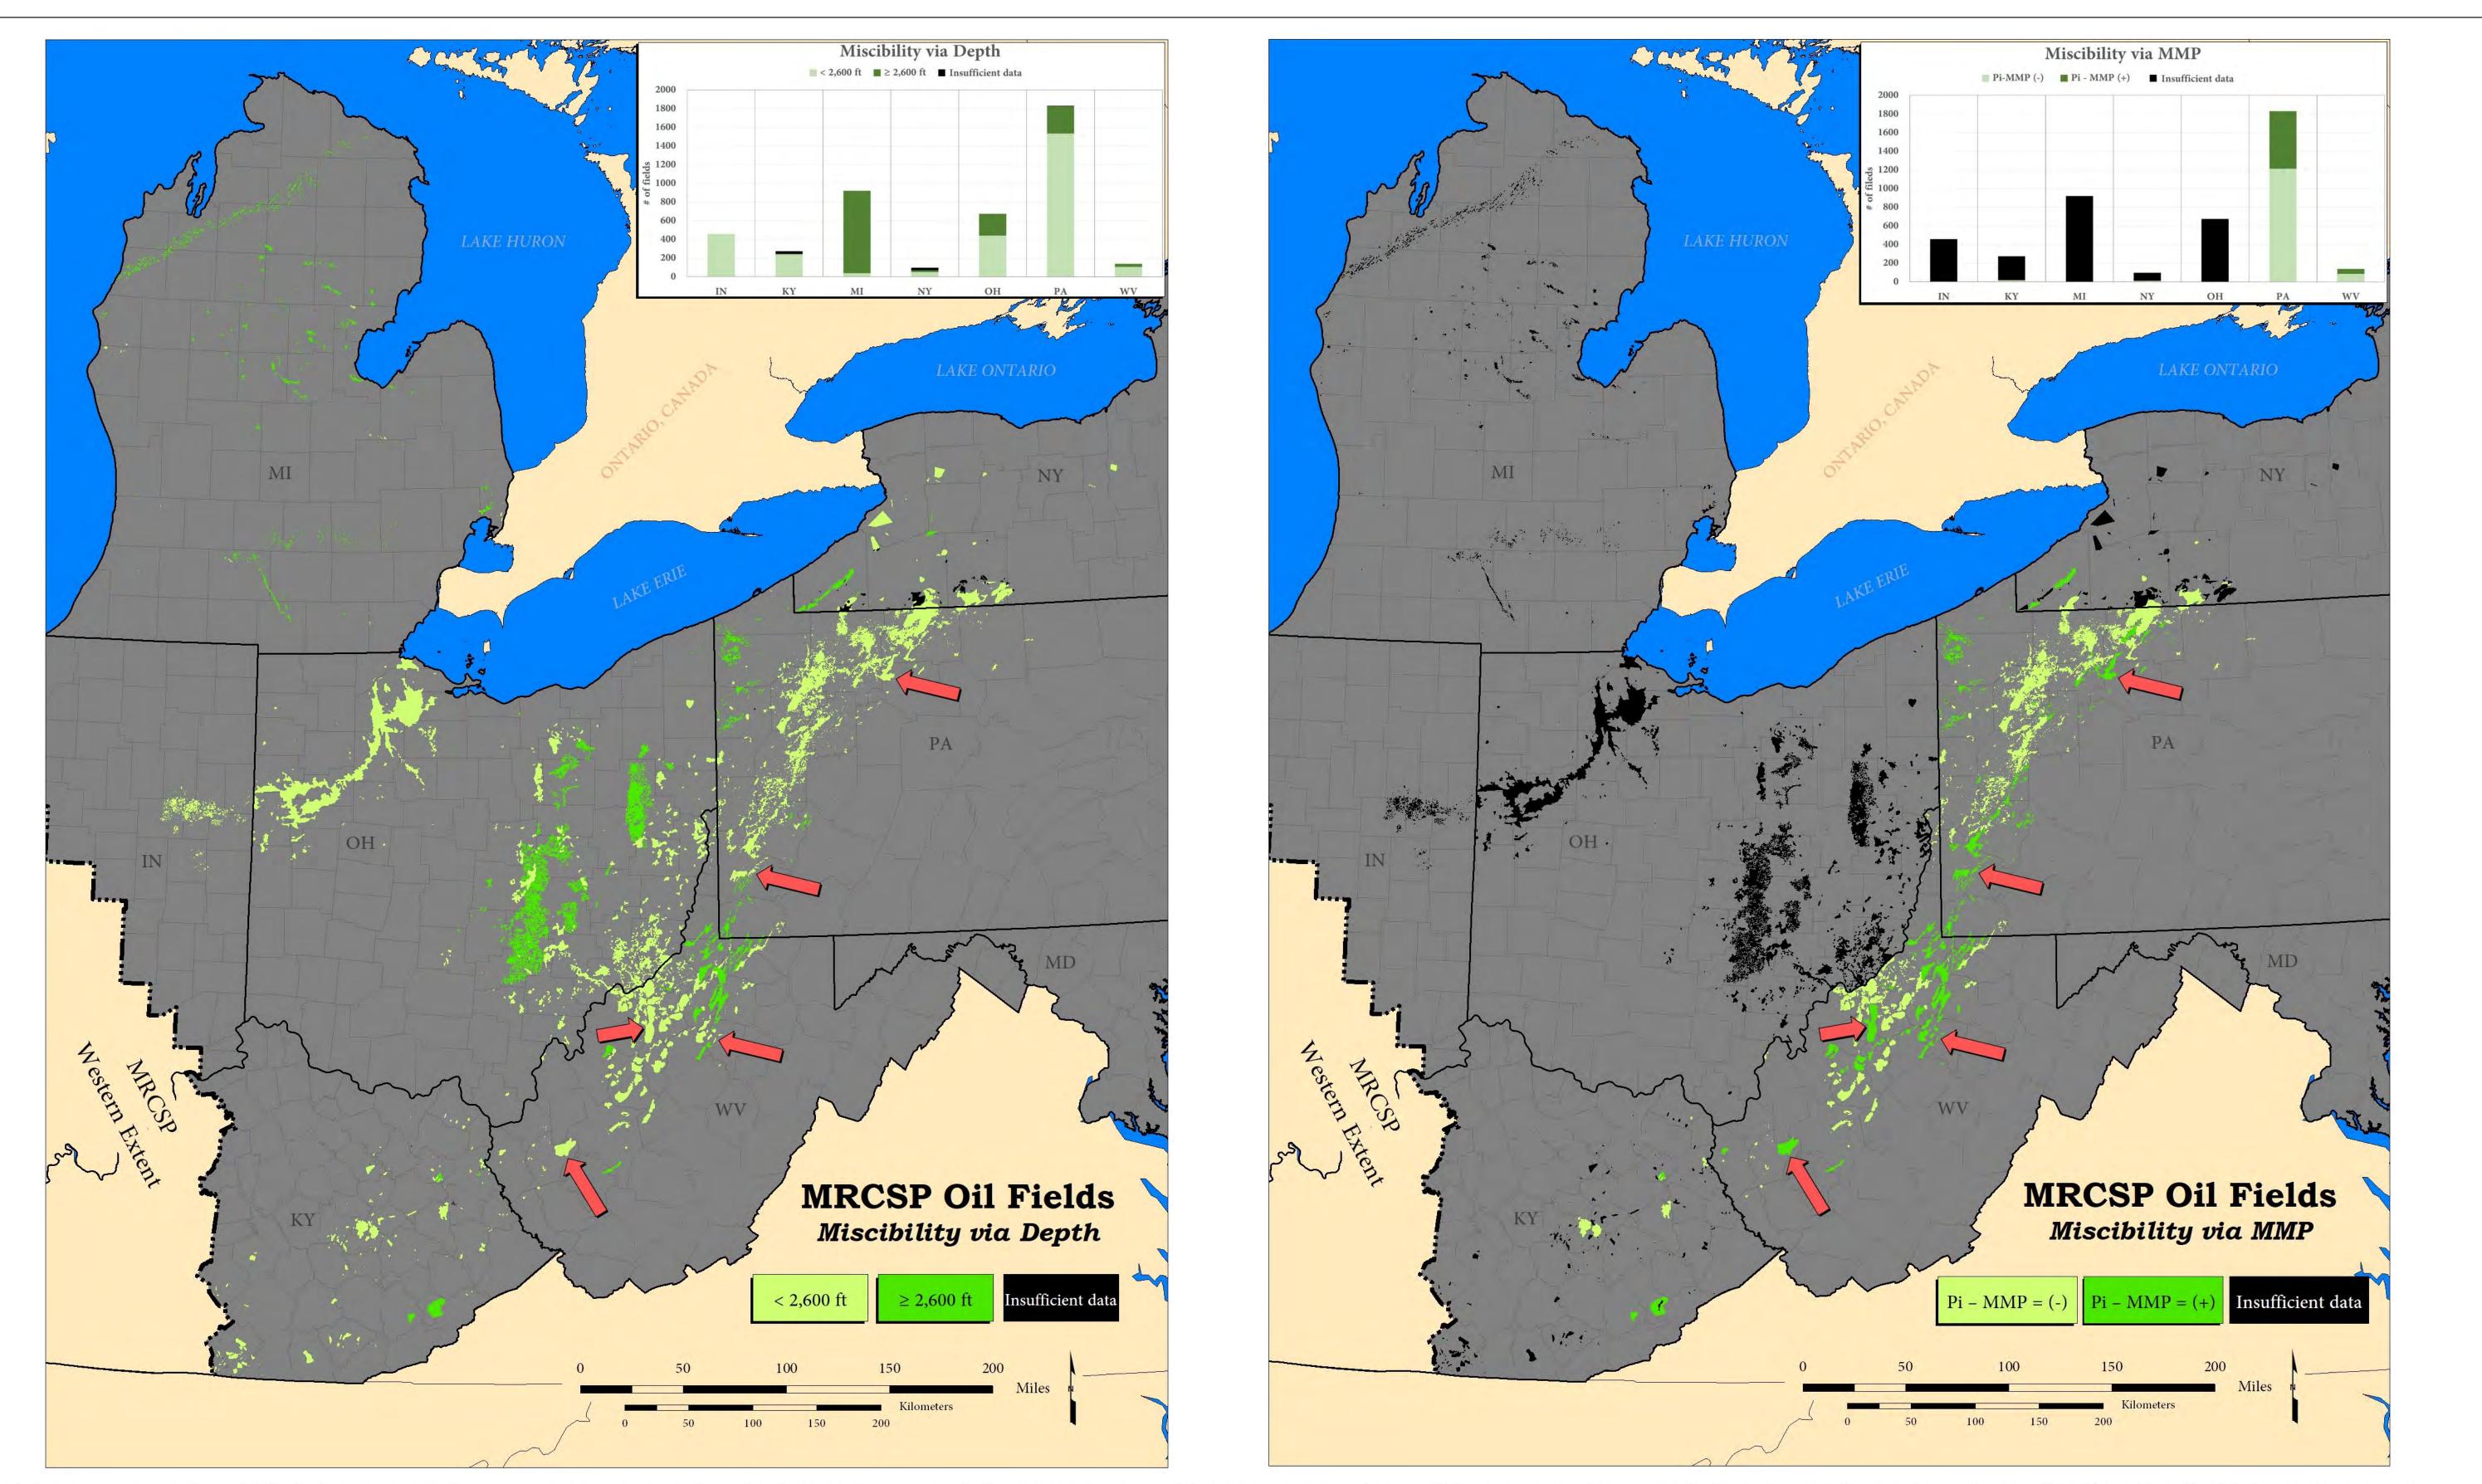



Oil recovery using CO₂ injection has been proven to be more beneficial in miscible fields than in those considered to be immiscible. Potential for miscibility can be determined using depth (*miscibility via* depth), or MMP (miscibility via MMP). MMP requires temperature and oil gravity data which can be more difficult to obtain than depth; therefore, miscibility via depth is acceptable for regional assessments, but miscibility via MMP should be determined for more detailed evaluations. MRCSP has traditionally defined miscible fields as being deeper than 2,600 ft. Although more data are required for the calculation, determining MMP can allow for a more detailed representation of miscible potential in an oil field. MMP values greater than the calculated hydrostatic pressure (Pi) are considered to be immiscible [Pi - MMP = (-)] (Takacs et al, 2010). The difference between the two methods is most noticeable in WV and PA, where oil gravities for 80% of the oil fields were predicted (red arrows).

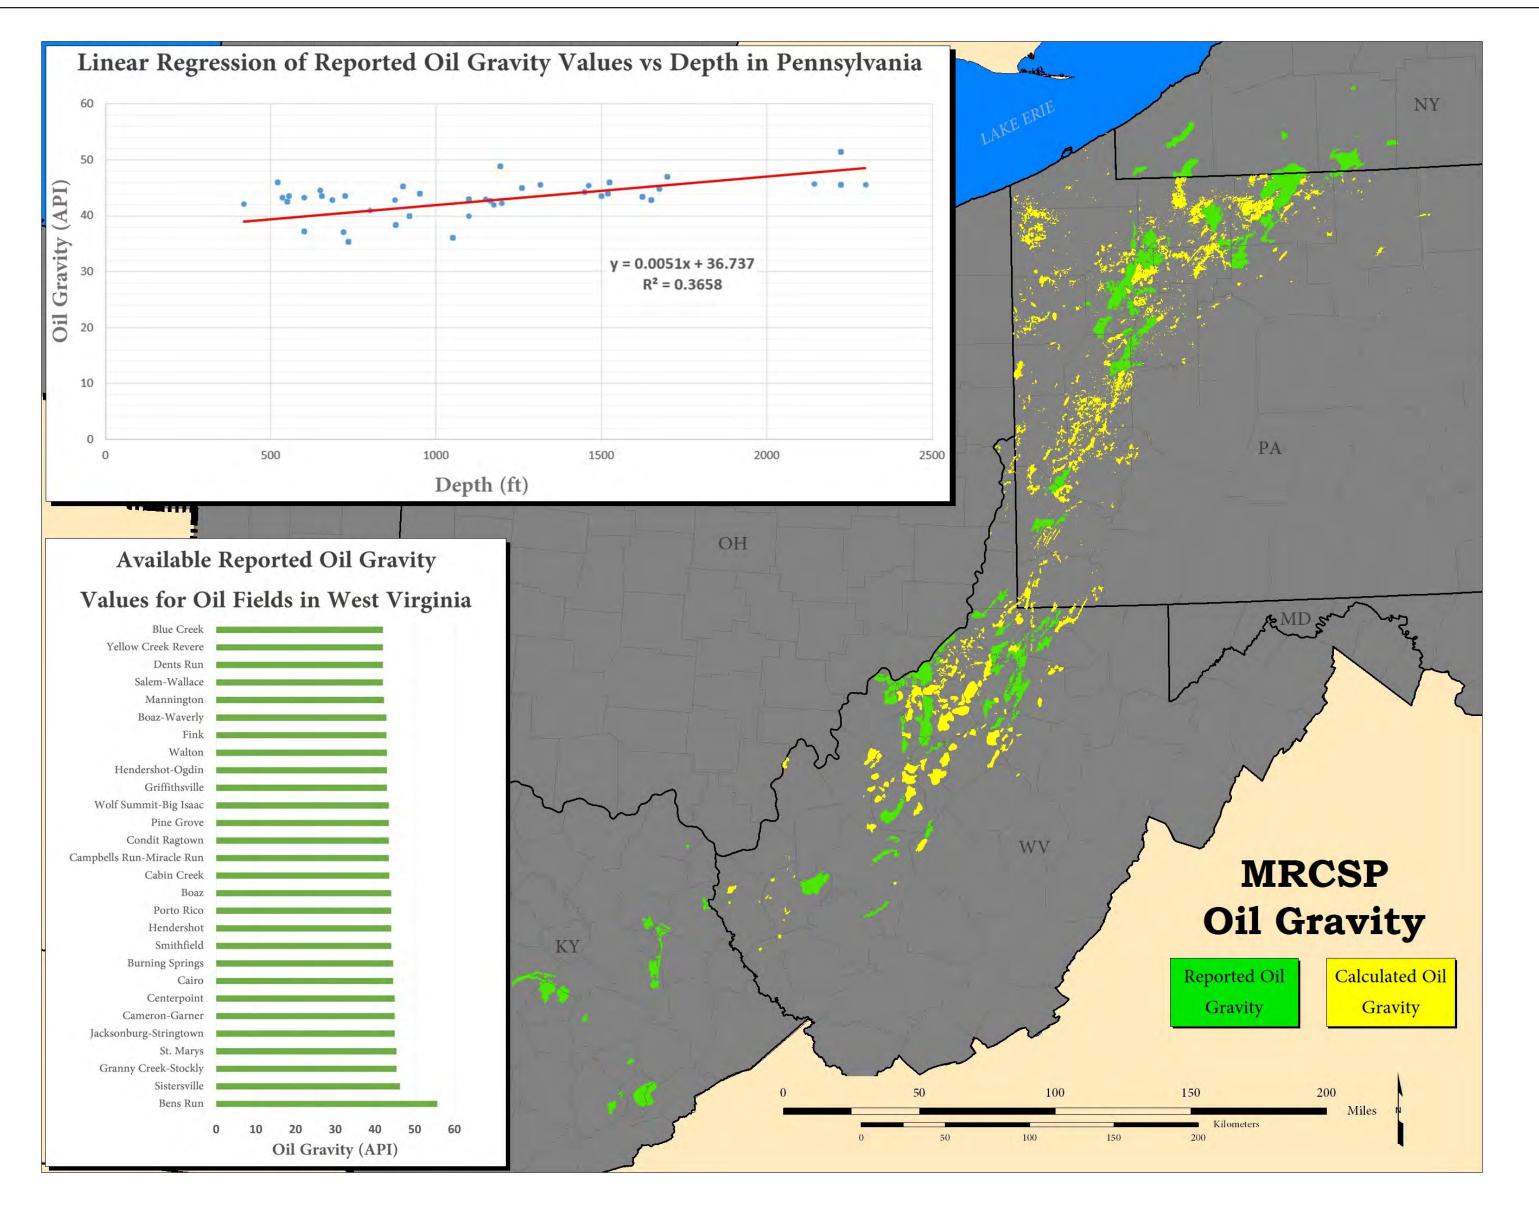



Only Appalachian Basin states reported oil gravities in select oil fields. Oil gravity is important because it is used to calculate Minimum Miscibility Pressure (MMP), one method for determining if a field is suitable for miscible EOR. In absence of reported values, WVGES determined that enough WV and PA oil gravity information was documented to predict missing oil gravities as a function of depth for wells in those states (Carter et al, 2015) (Whieldon and Eckard, 1962).

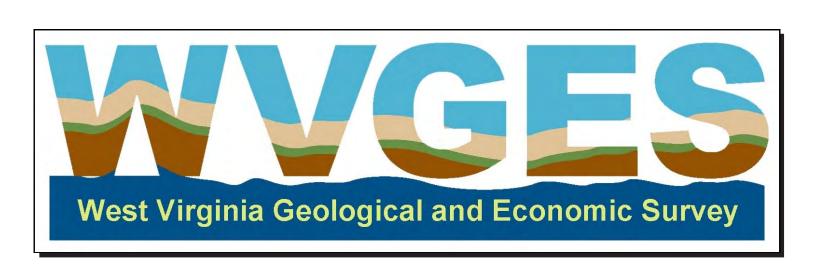


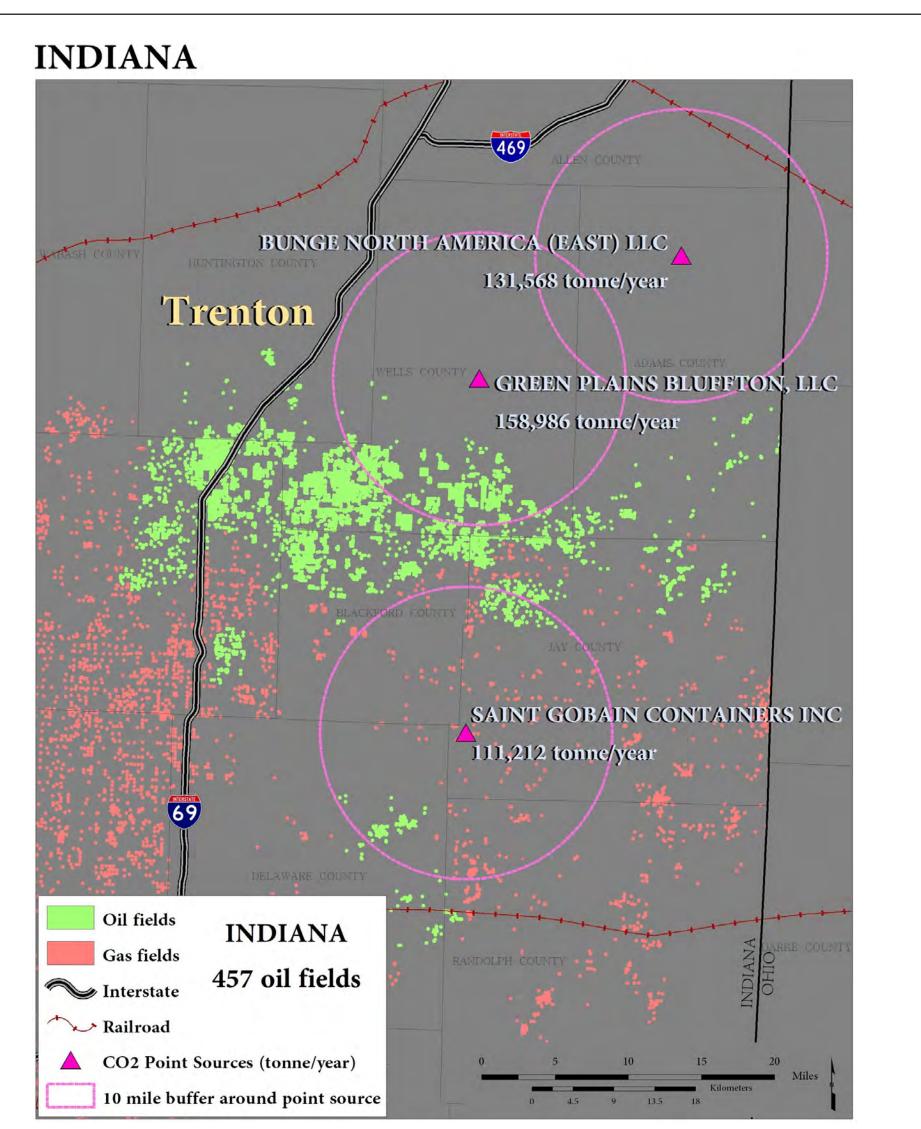



All oil fields in Indiana, which are located in the eastern part of the state, are named "Trenton", after the Ordovician Trenton Limestone. Due to insufficient data, depth is the most effective way to determine miscibility, and an accurate storage capacity cannot be determined for any of the oil fields.


<u>Averages</u>

* depth = 980 ft $^{\circ}$ temperature at depth = 70° F $^{\rm P}_{\rm i}$ = 426 psi (* reported ^ calculated)

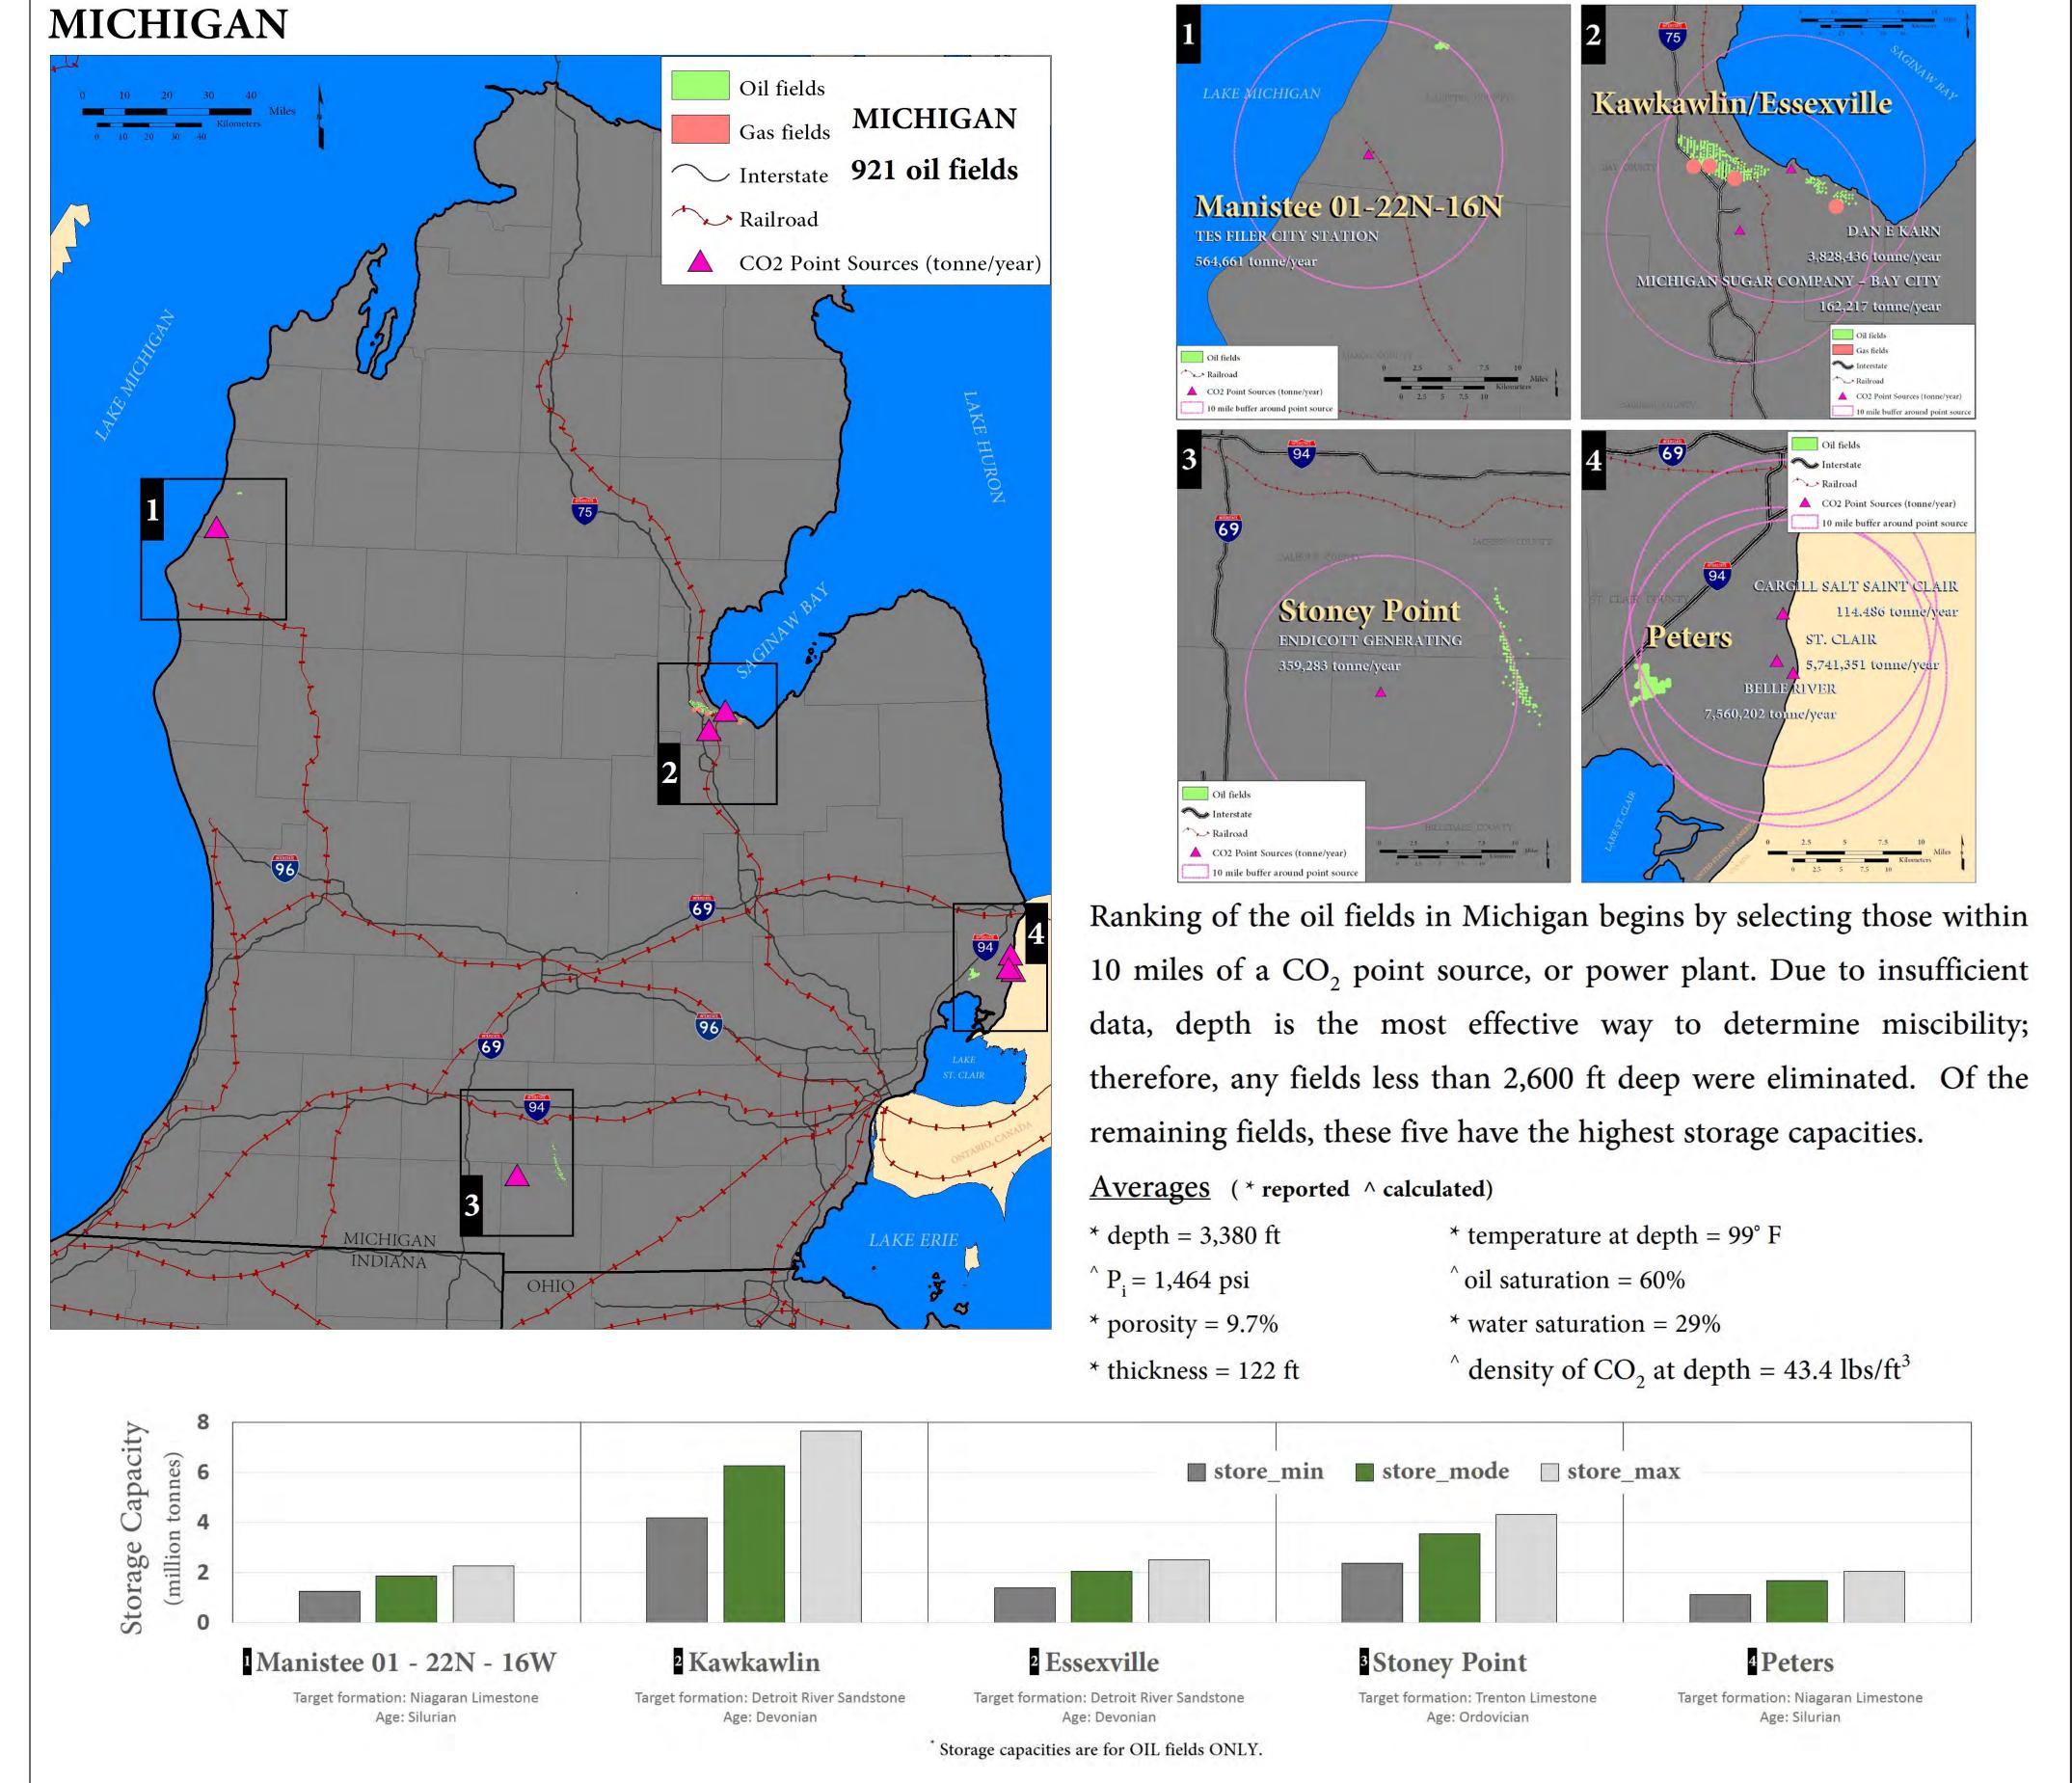


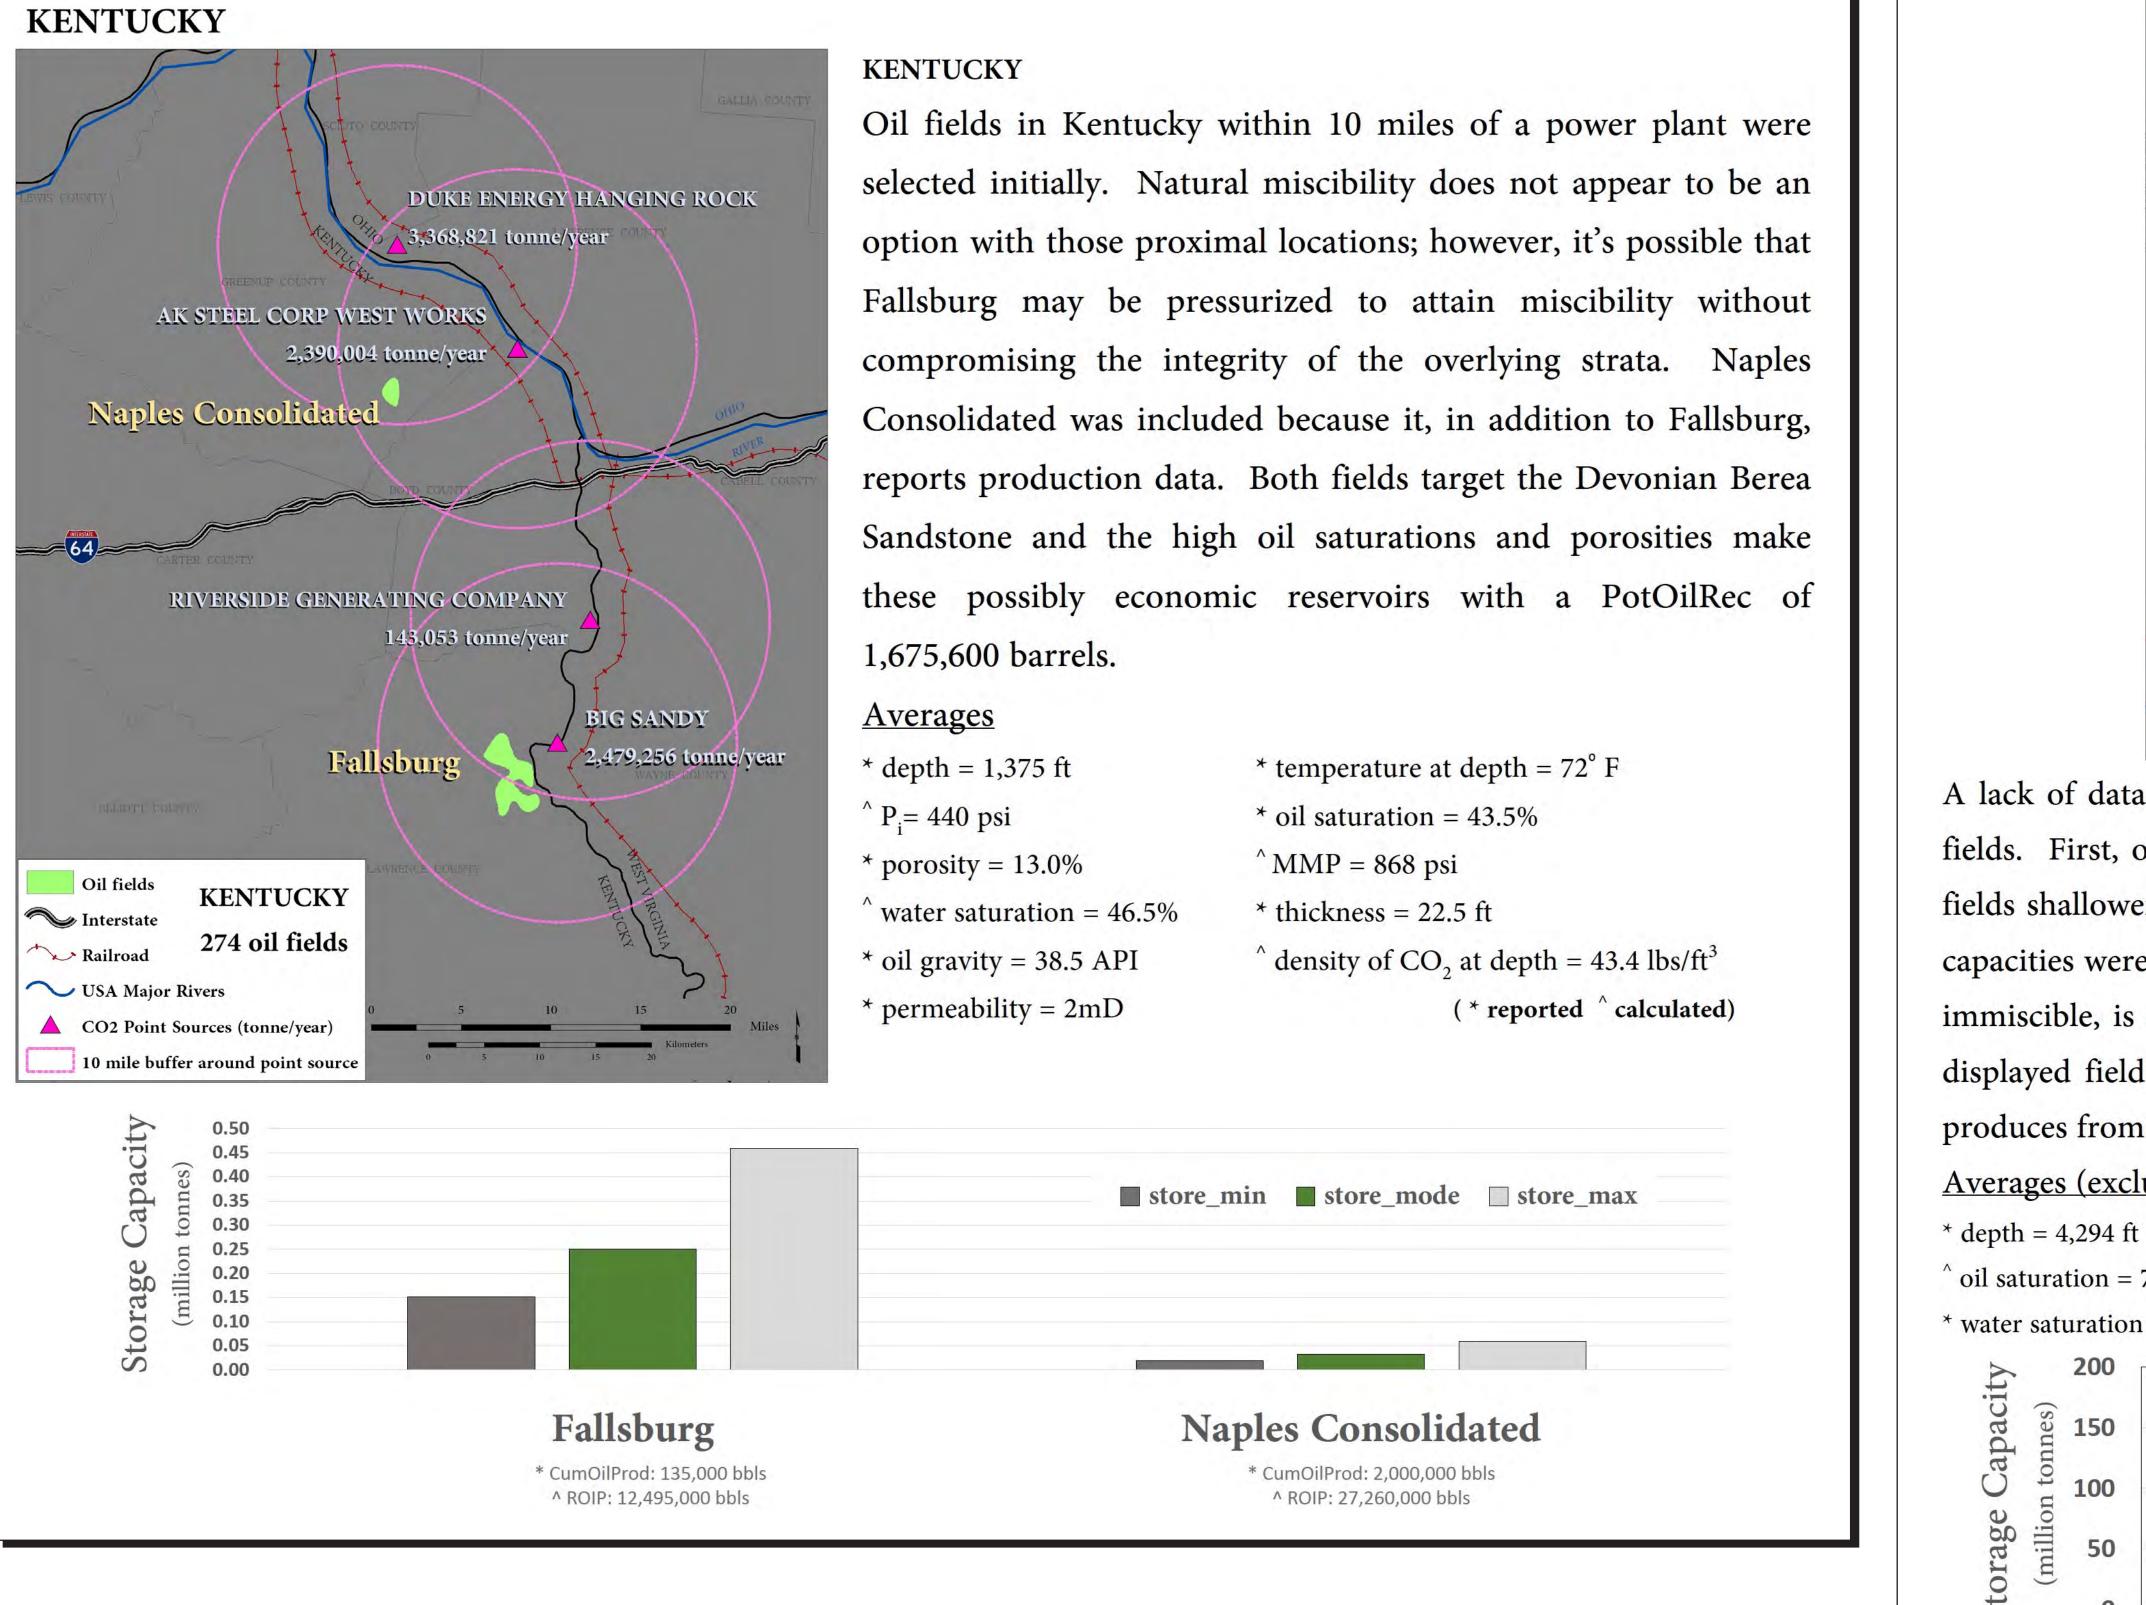

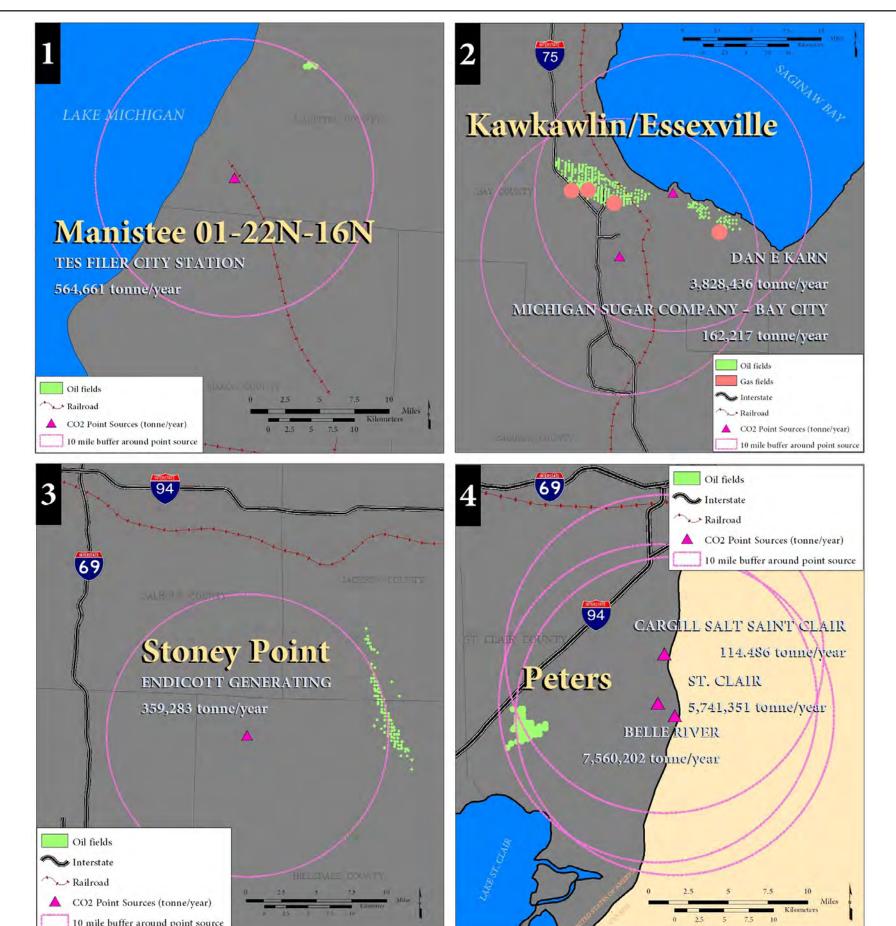


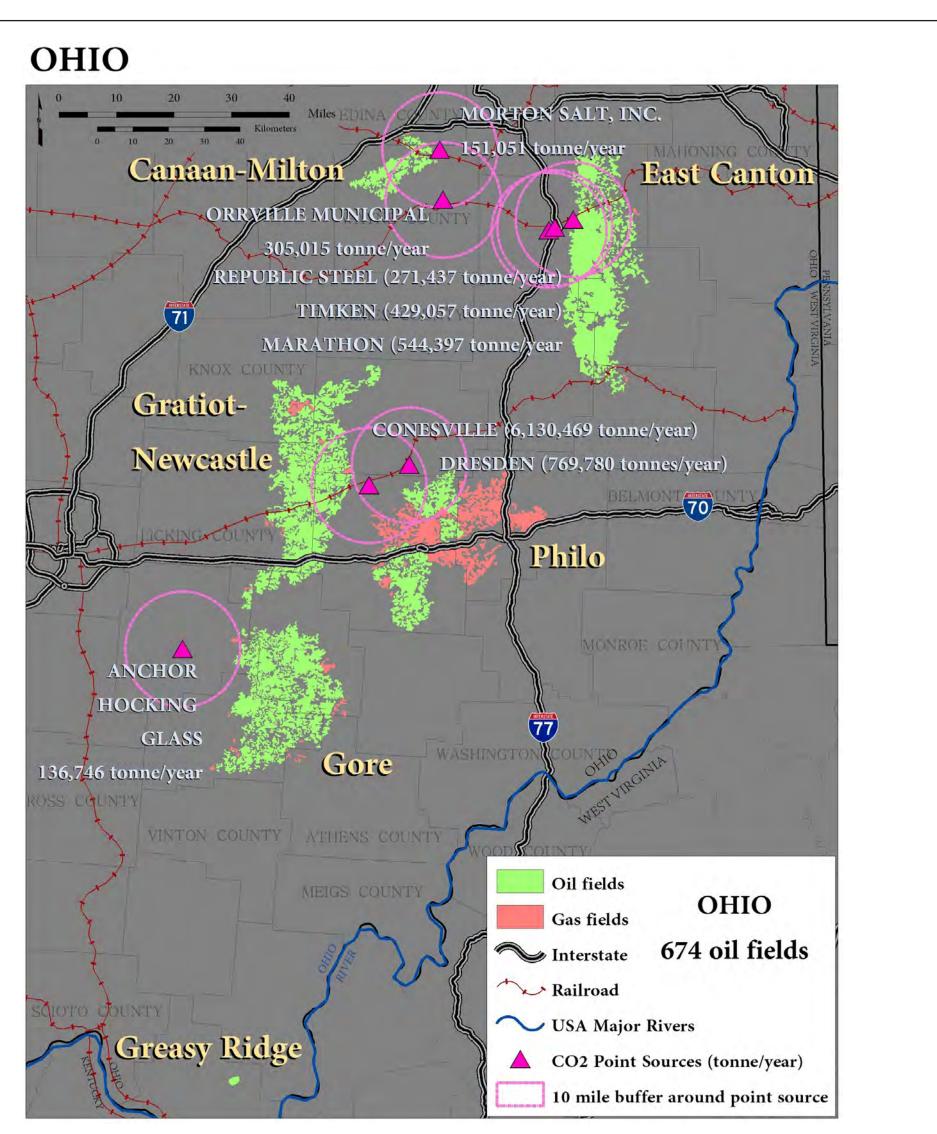

A lack of data makes it possible to only determine miscibility via depth in Ohio's oil fields. First, oil fields were selected based on their proximity to point sources. Next, fields shallower than 2,600 ft were eliminated and the top five with the highest storage capacities were selected. The Greasy Ridge field to the south, although considered to be immiscible, is displayed because it is the only field in Ohio with volumetric data. All displayed fields target the Silurian Clinton Sandstone, except for Greasy Ridge which produces from the highly porous, and permeable, Pennsylvanian Pottsville Sandstone. Averages (excluding Greasy Ridge)

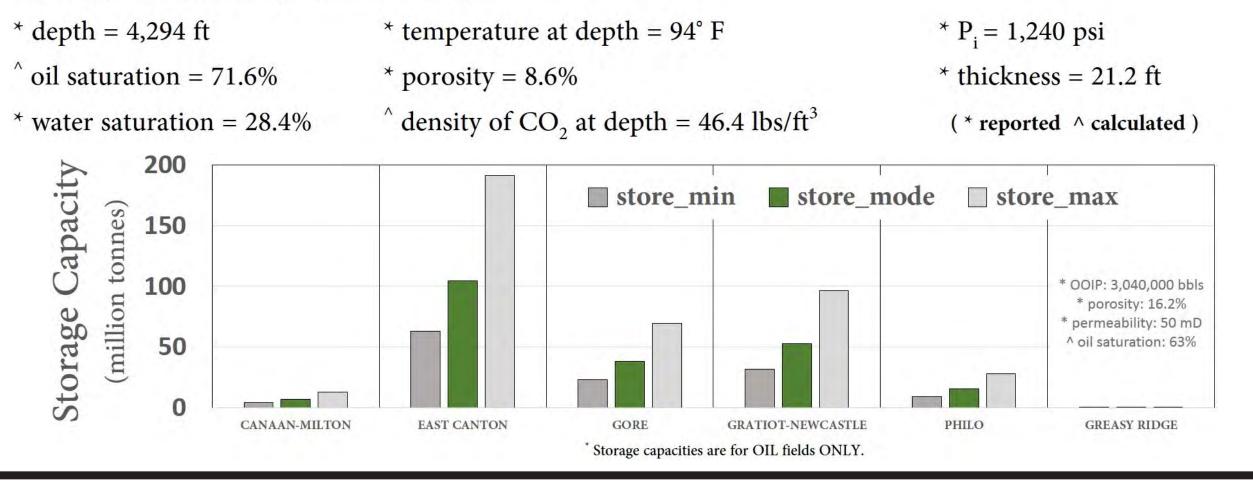


100

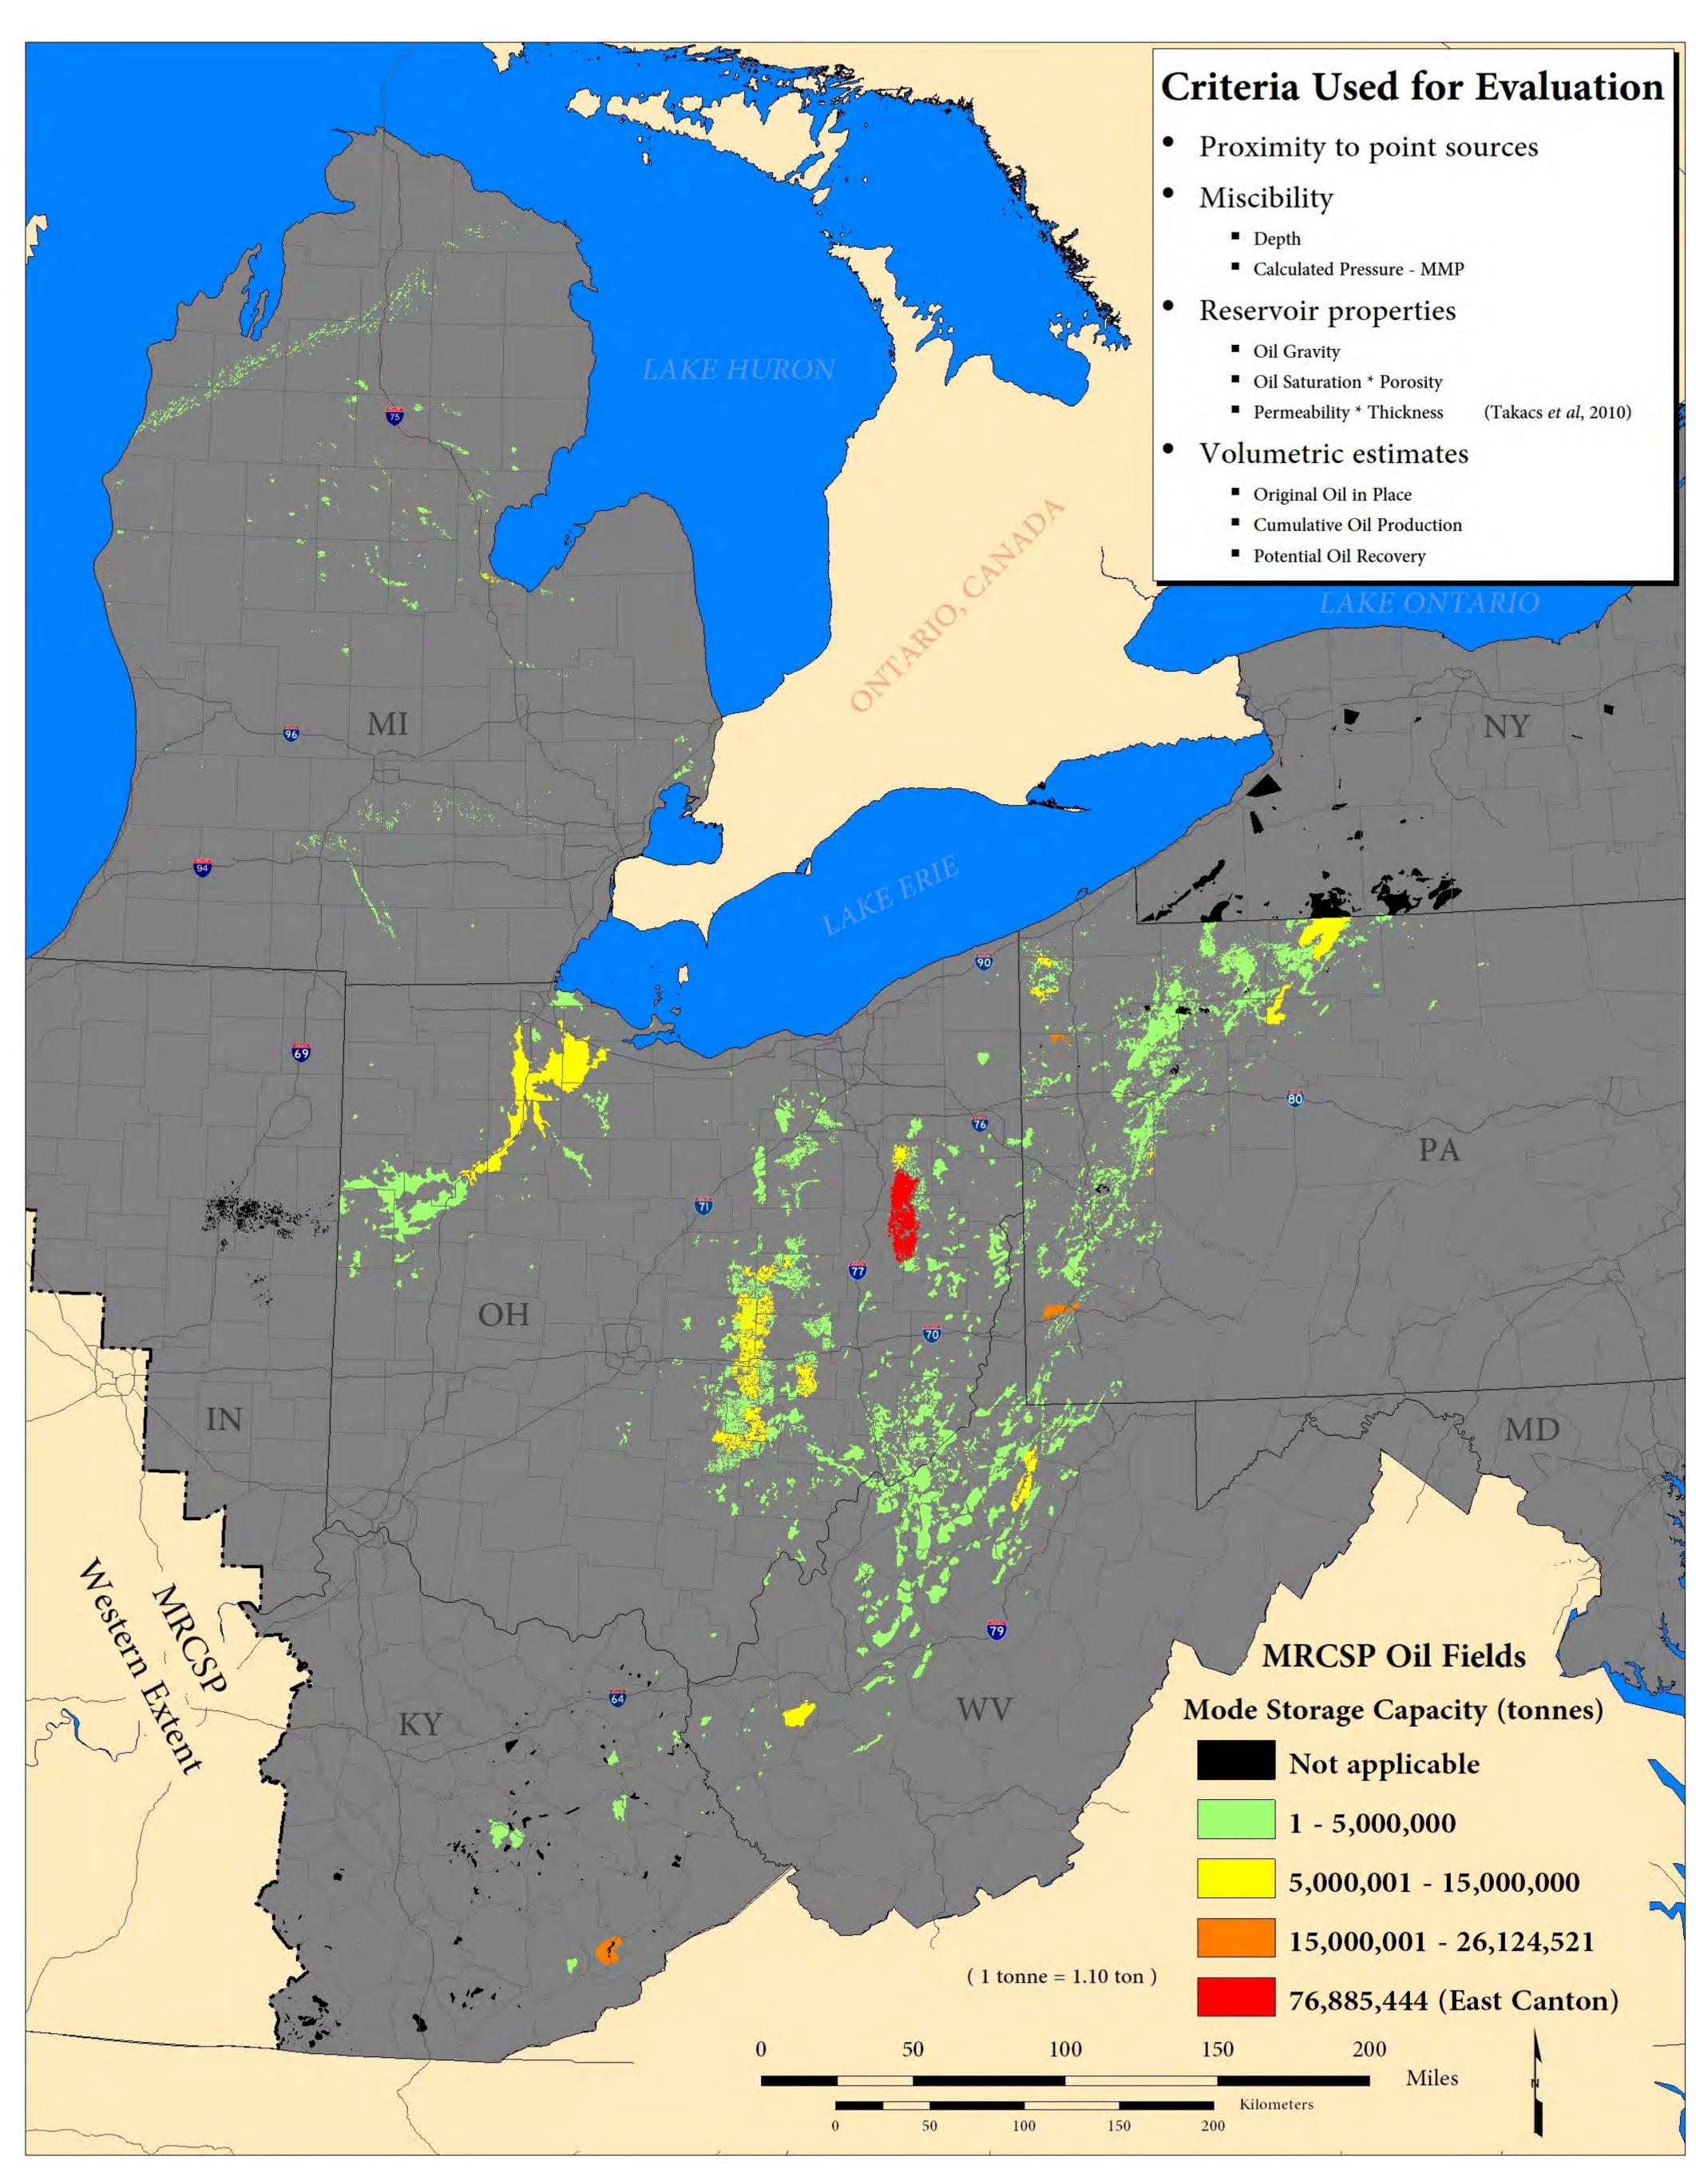


There are approximately 1,300 individual oil fields reported in the MRCSP region which are represented by 4,391 polygons of varying area and their associated data. Several criteria are being used to evaluate these oil fields in terms of their ability to enhance recovery of oil via CO, floods. The "mode" storage capacity is an estimate of the individual polygons' ability to store CO₂. Of the three estimates used in this study, it is expected to be the most likely outcome when compared to the "minimum" and "maximum", which are conservative and generous, respectively (Kuuskraa et al, 2011). Approximately 20% of the rows of data do not have attributes which allow for the calculation of storage capacity (mapped in black). The bulk of the remaining 80% contain estimates for storage of up to 26,124,520 tonnes of CO₂. The exception is East Canton oil field in Ohio, which dwarfs all other polygons in the region with an estimated mode storage capacity of 76,885,444 tonnes (in red).


REFERENCES

- Carter, K.M., Moore, M.E., Harper, J.A., Whitfield, T.G., Dunst, B.J., Anthony, R.V., Schmid, K.W., and Chipman, A., 2015, Oil and gas fields and pools of Pennsylvania: 1859 2011: Pennsylvania Geological Survey, 4th ser., Open-File Report OFOG 15-01.0, 14 p., Portable Document Format (PDF), and associated File Geodatabase Feature Dataset.
- Kuuskraa, V.A., Leeuwen, T.V., Wallace, M., 2011, "Improving Domestic Energy Security and Lowering CO, Emissions with 'Next Generation CO,-Enhanced Oil Recovery (CO,-EOR)", United States Department of Energy/National Energy and Technology Laboratory, DOE/NETL-2011/1504.
- Midwest Regional Carbon Sequestration Partnership (MRCSP), 2005, Characterization of Geologic Sequestration Opportunities in the MRCSP Region Phase I Task Report, Open-File Report prepared by Ohio Division of Geological Survey under subcontract to Battelle Memorial Institute, DOE Cooperative Agreement No. DE-PS26-05NT42255, 152 p.
- Midwest Regional Carbon Sequestration Partnership (MRCSP), 2009, Evaluation of CO2-Enhanced Oil Recovery and Sequestration Opportunities in Oil and Gas Fields in the MRCSP Region, Phase II Task Report, DOE Cooperative Agreement No. DE-FC26-05NT42589, OCDO Grant Agreement No. DC-05-13, 177 p.
- NATCARB, 2015, Carbon Storage Atlas Fifth Edition/Database, (accessed March 22, 2016 www.natcarb.org), Sponsored by United States Department of Energy/National Energy and Technology Laboratory.
- Takacs, K.G., Nuttall, B.C., Parris, T.M., 2010, Assessment of Kentucky Fields for CO₂-Enhanced Oil Recovery, Report of Investigations 21, Series XII, Evaluation of Geologic CO₂ Sequestration Potential and CO, Enhanced Oil Recovery in Kentucky, Chapter 2, p. 10-36. • Whieldon, C.E., Eckard, W.E., 1963, West Virginia Oilfields Discovered Before 1940, United States Bureau of Mines, Bulletin 607, 187 p.

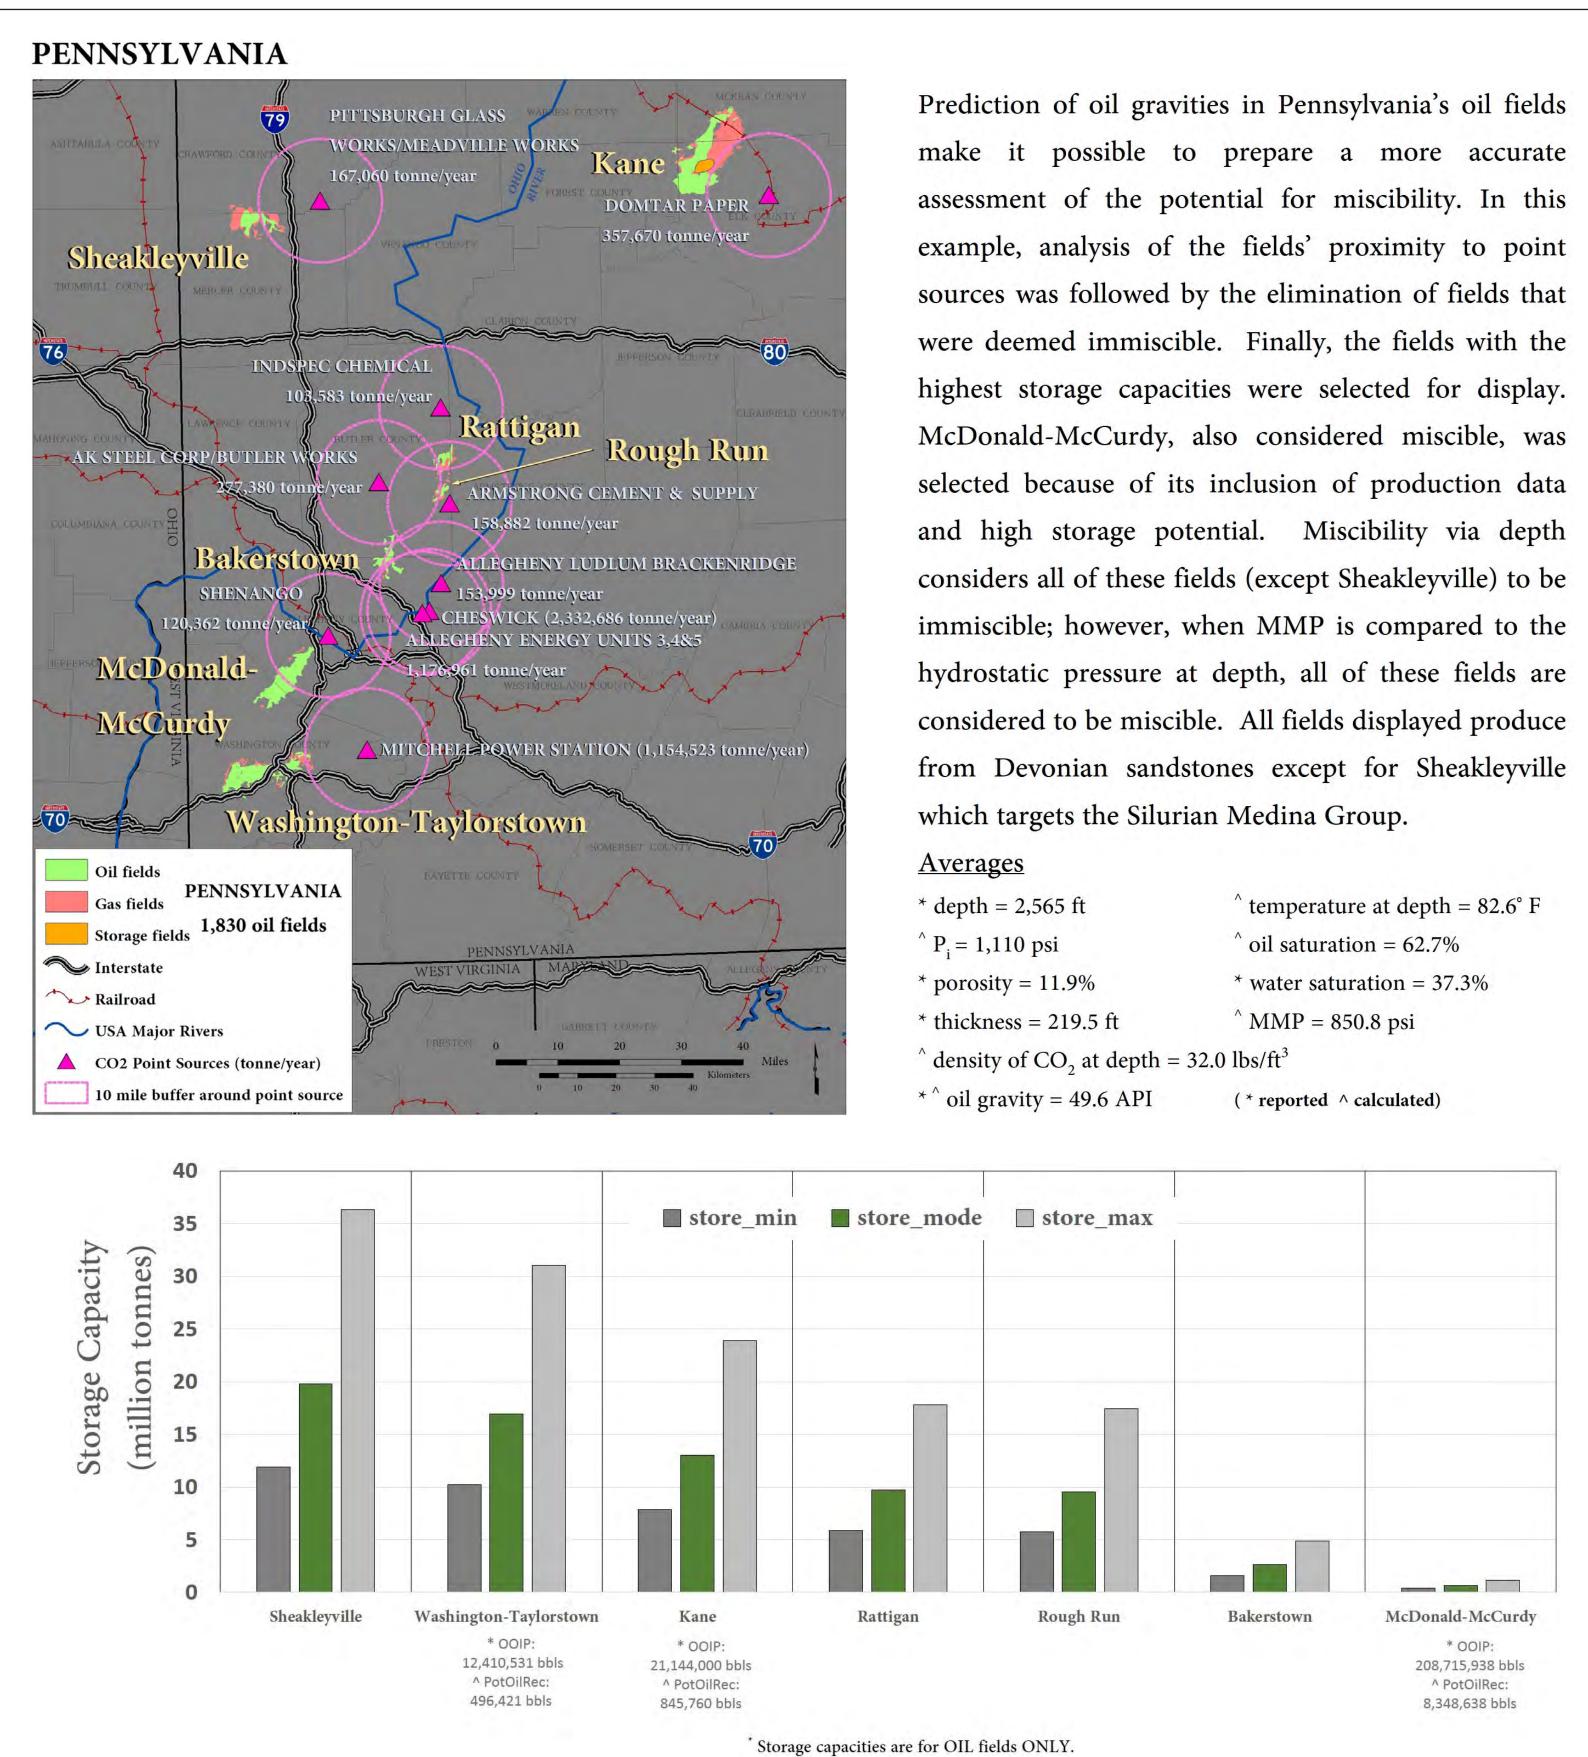



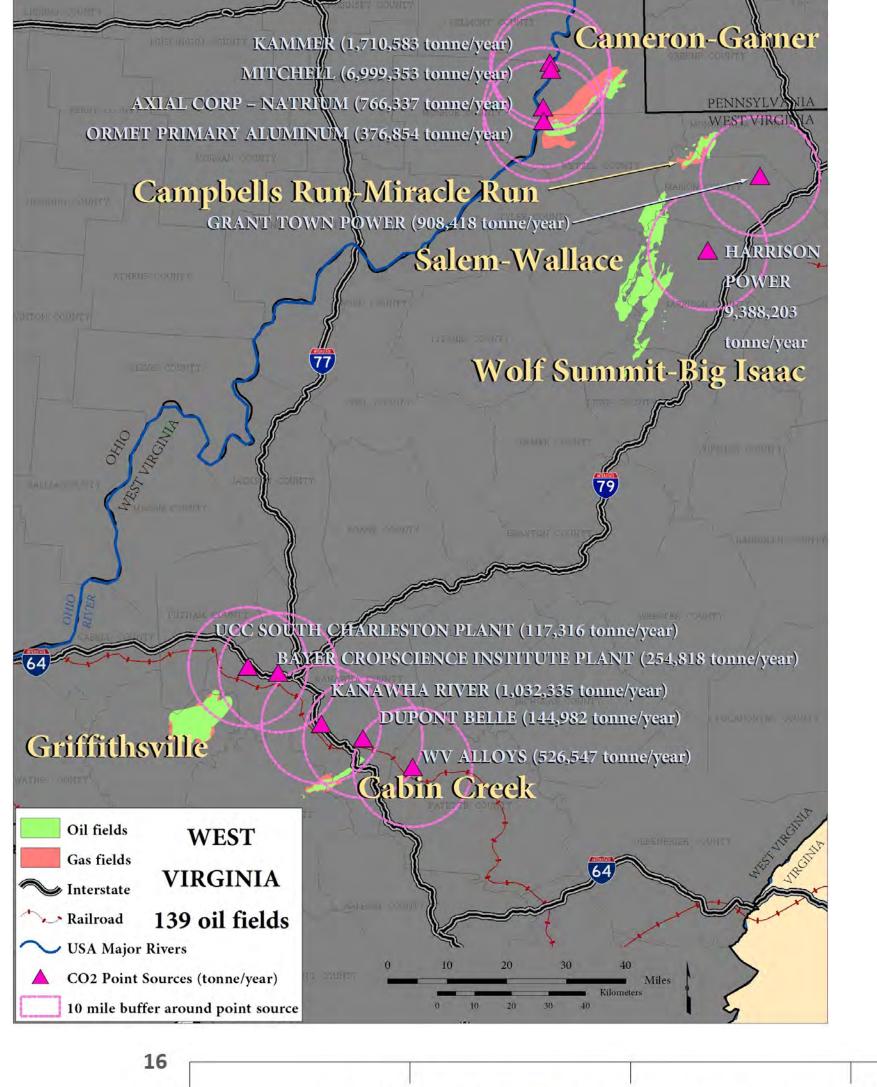


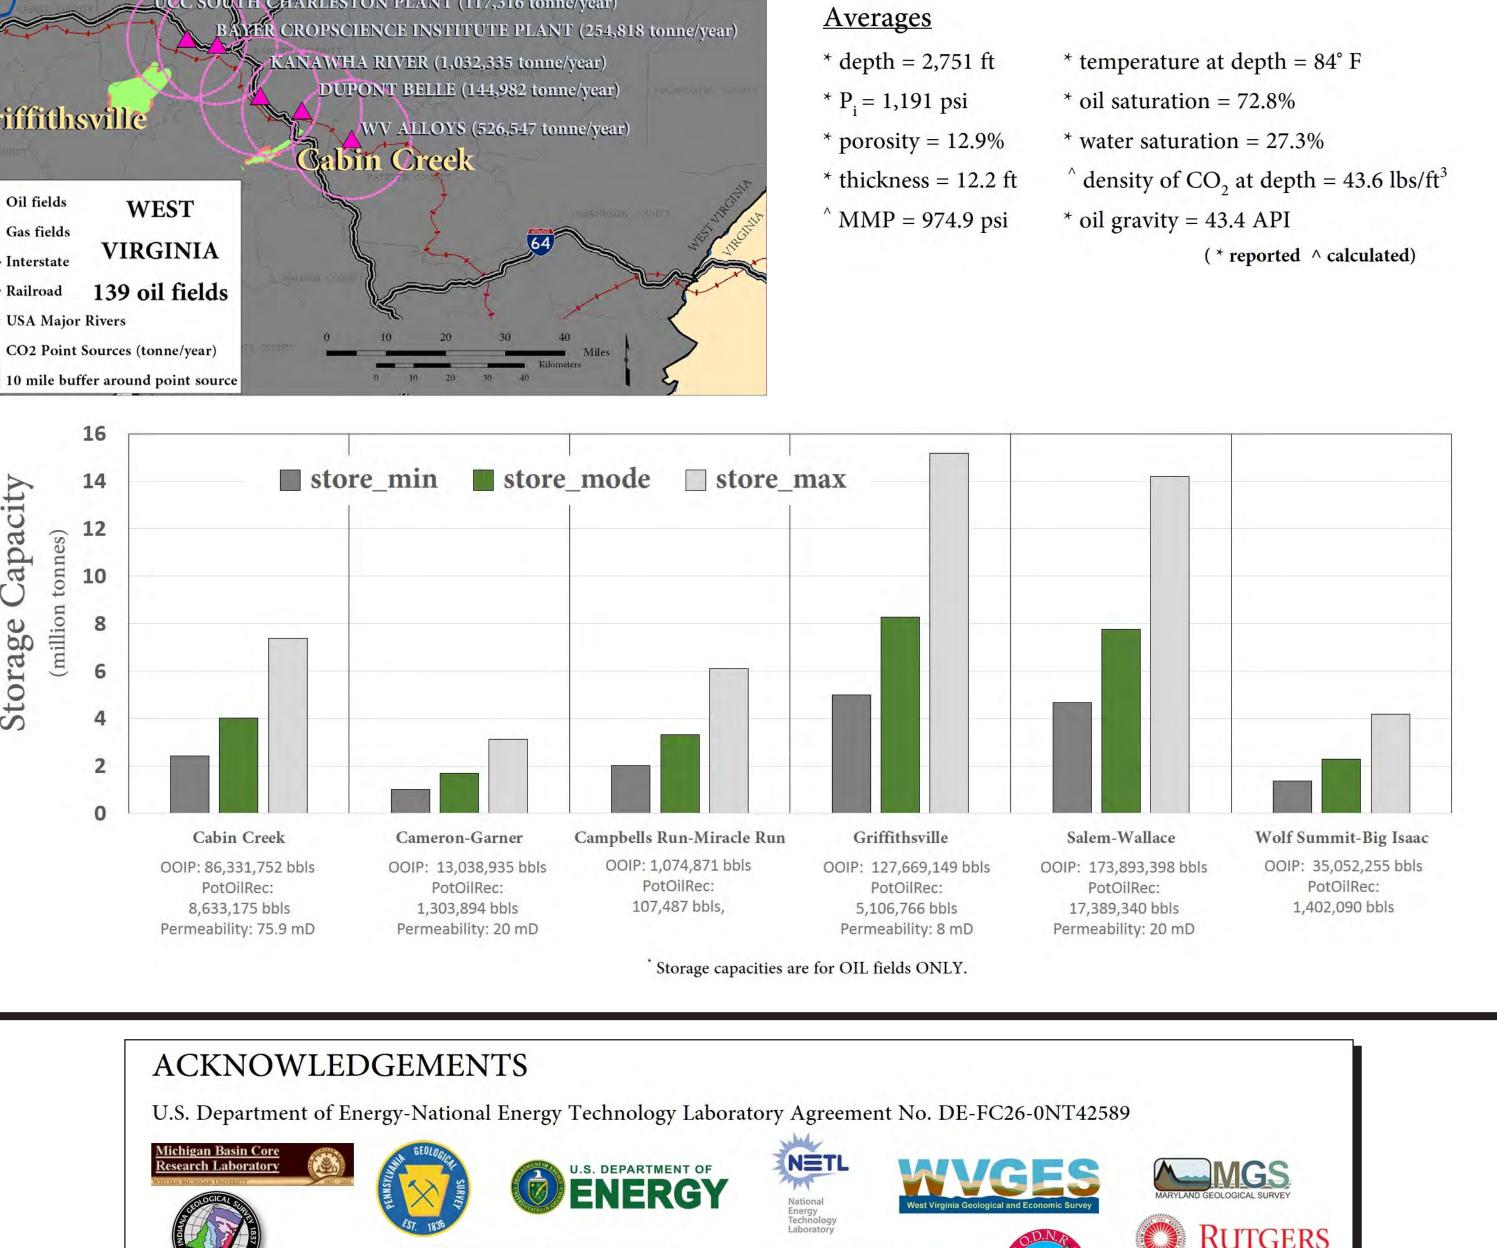

Battelle

siness of Innovation



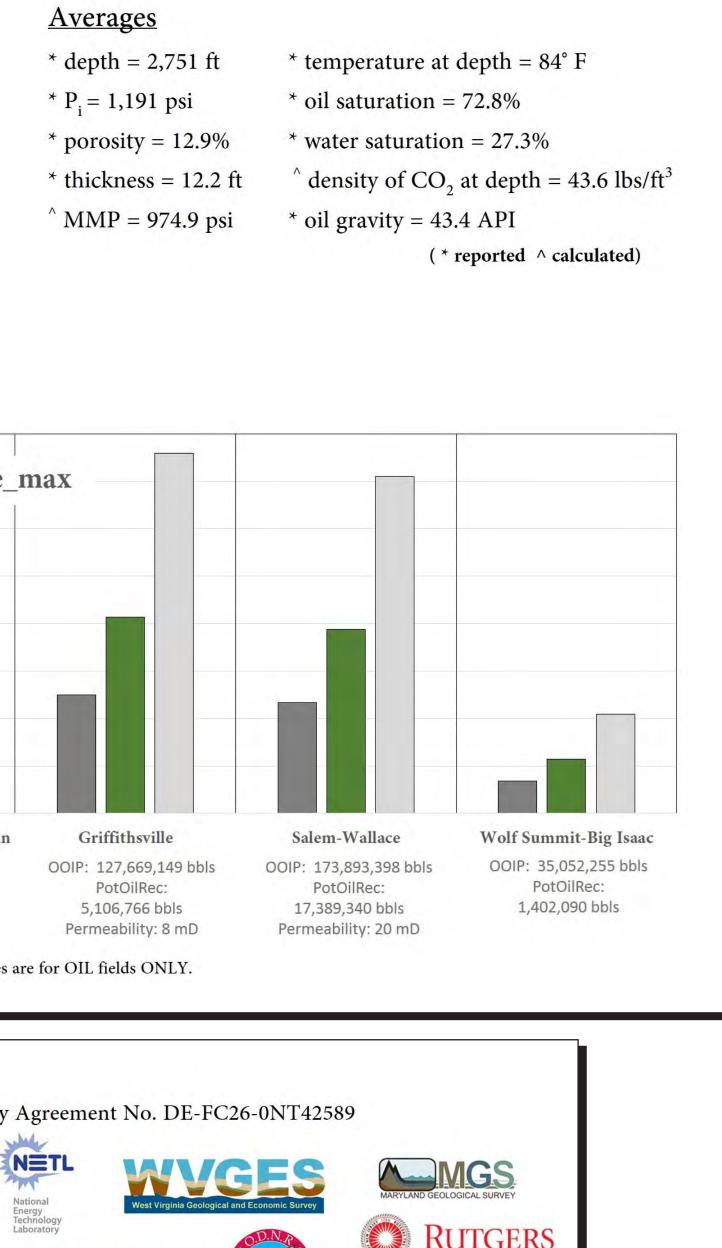


NEW YORK State Museum


As in Pennsylvania, prediction of oil gravities in West Virginia's oil fields allow for more precise miscibility evaluations. Following a selection of oil fields within 10 miles of CO₂ point sources, fields considered miscible via MMP were sorted according to storage capacity. The top six oil fields with the highest storage capacities were selected for display and all target Devonian sandstones. Griffithsville and Cabin Creek are located in a highly industrialized area where nearly four years worth of CO₂ emissions from power plants within 10 miles of both fields could potentially be sequestered.



NEW YORK

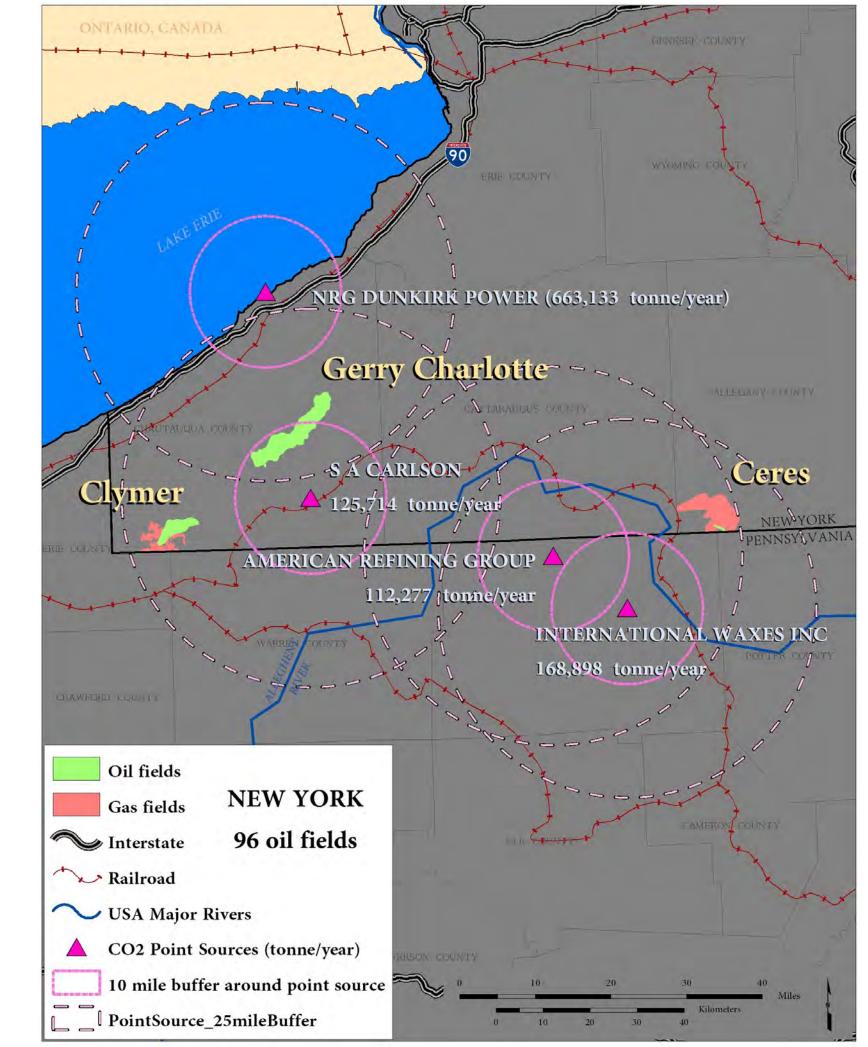

Available reported oil gravity data allowed for calculation of MMP for several of the oil fields in New York. Both capable of miscible completions, Gerry Charlotte is within 10 miles of a power plant, while Clymer is inside of 25 miles. Ceres was selected for display because it is the only petroleum field in the State containing production and storage parameters. Also, it's possible that it may obtain miscibility if pressurized.

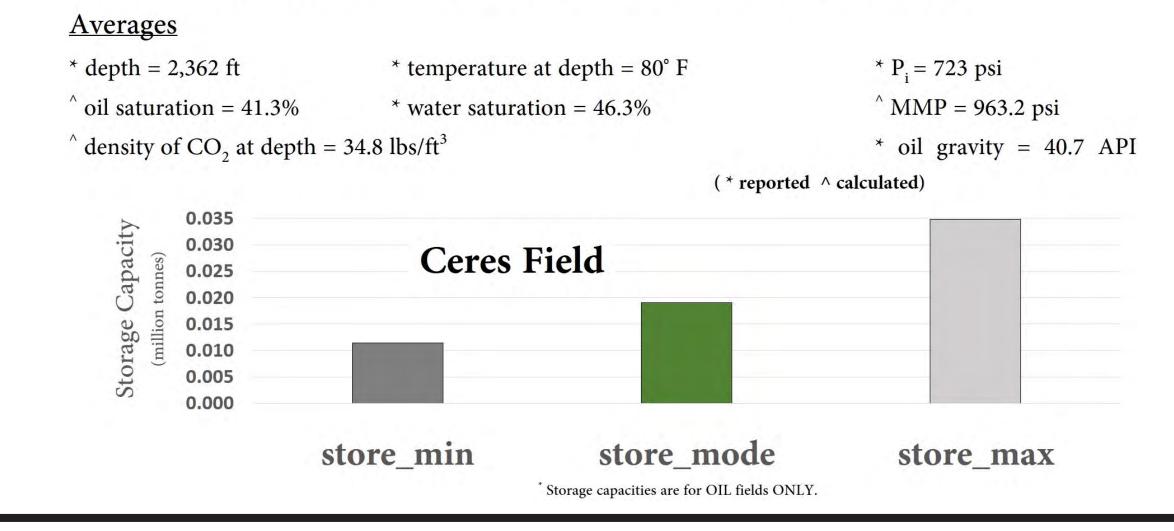

CONCLUSION

Utilization of CO, floods for enhanced oil recovery (EOR) is a developing technology in the Appalachian and Michigan basins. While it may still be too early to predict its contribution to America's future energy balance, many opportunities for implementation exist within the region. A comprehensive assemblage and evaluation of petroleum data by the MRCSP Geo-Teams will enable stakeholders from diverse backgrounds to evaluate of these opportunities on a regional, and/or field-specific,

The latest phase of MRCSP research added several new attributes to an alreadycomprehensive database in order to identify and rank the best opportunities for CO₂ EOR throughout the 10-state region. Detailed reservoir parameters are necessary to perform a comprehensive evaluation of any given EOR target, and a ranking of opportunities depends on both availability of data and relative consideration or weight assigned to the various attributes. For example, a ranking based upon identifying fields with high storage capacities yields vastly different results than a ranking that focuses on reservoirs capable of miscible completion, or those in closest proximity to sources of

A renewed focus on CO₂-EOR also helped to identify information severely lacking in the MRCSP region, such as permeability and oil gravity. Where possible, steps have been taken to increase data density and enable improved reservoir characterization. This is most notable in the Appalachian Basin states of Pennsylvania and West Virginia, where calculated oil gravities replaced hundreds of null values. As a result of these combined efforts, MRCSP continues to build a platform for future energy development throughout the ten-state region.